




Materials used

Body: POM
O-Rings: EPDM (black)
Silicone (blue)

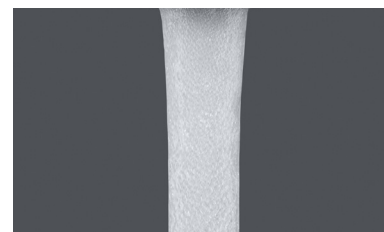

Aerated stream


Model Overview

Restricted flow rates	Color Code	Part. No.	Wetted surface area (in mm²)
1.0 gpm max. @ 60 psi	ivory	44.3231.010	3932
1.5 gpm max. @ 60 psi	green	44.3232.010	3931
1.75 gpm max. @ 60 psi	brown	44.3239.010	3930
2.0 gpm max. @ 60 psi	olive	44.3233.010	3929
2.2 gpm max @ 60 psi	red	44.3234.010	3928
V optimal performance & aeration: 0.2-1 bar	blue	white ring 44.3230.010	3538


Imperial flow rates	Color Code	Part. No.	Wetted surface area (in mm²)
PCA® 1.0 gpm max.	dark blue	44.3258.010	4006
PCA® 1.2 gpm max.	pink	44.3260.010	4006
PCA® 1.5 gpm max.	green	44.3256.010	4006
PCA® 1.75 gpm max.	light blue	44.3261.010	4006
PCA® 2.0 gpm max.	lilac	44.3257.010	4006
PCA® 2.2 gpm max.	yellow	44.3253.010	4006

Metric flow rates	Color code	Part. No.	Wetted surface area (in mm²)
PCA® 5.0 l/min.	orange	44.3251.010	4006
PCA® 7.0 l/min.	light green	44.3255.010	4006
PCA® 8.0 l/min.	white	44.3254.010	4006


Application Areas




Drinking
water only



Basin faucet






Kitchen
faucet



Not suitable for
pressureless
water heaters

Assembly Instructions



ATTENTION!

Max. mounting torque **0.5 Nm**
Do not use silicone oil/grease


Datasheet

CACHÉ® HONEYCOMB® Aerator
TT Size Male M16.5x1


NEOPERL®

flow, stop and go®

Dimensions (in mm)

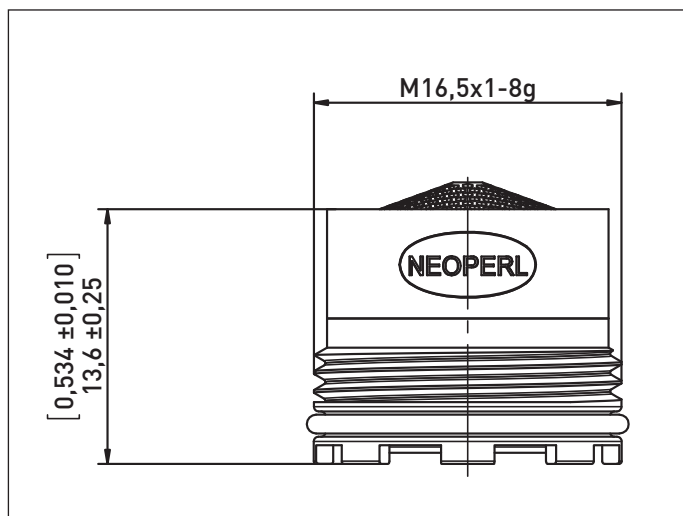

CACHÉ® HC TT M16.5x1

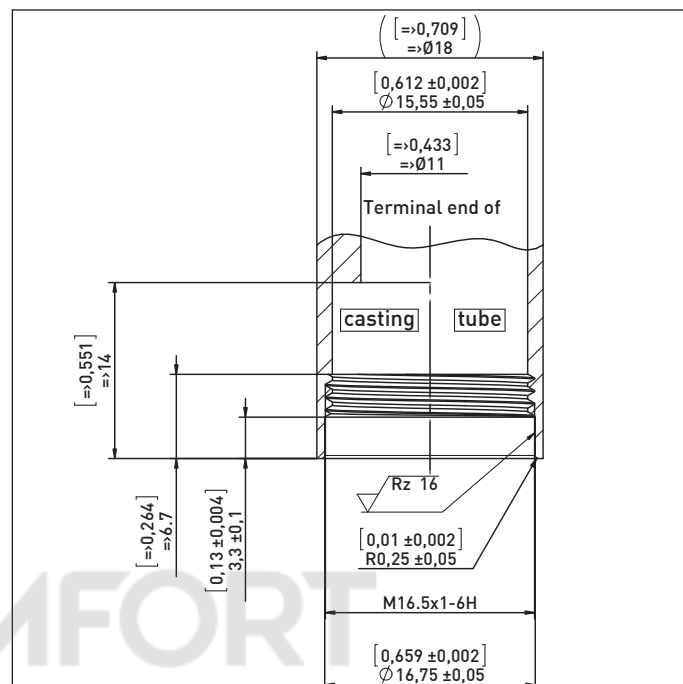

Recommended Mounting Dimensions



For pressure resistance reasons,
thread must be true to gage!
Screw aerator in until flush with spout end.

ATTENTION!



Product may not be altered!
May not be used for hot water application exceeding 70°C

Operating Conditions

Continuous



Short-term (3 minutes max.)



Indicated pressure values refer to supply line pressure.
Avoid water hammer.

Trademarks are registered in various countries