

EAN: 6414150088261
static.oras.com/7402U



- Shower
- Thermostatic
- Wall mounted
- Chrome
- Temperature control handle, Flow control handle
- Turn operated diverter, Integrated into flow control handle
- Hand shower, Shower rail, Overhead shower, Adjustable shower rail bracket, Shower hose (1750 mm), Variable fixing points, Rotatable ball joint connection, Anti limescale technology (easy to clean)
- Intense - invigorating water stream
- Safety stop against scalding at 38°C, The housing of the fittings conducts minimal heat
- Ceramic head part for flow control, Thermostatic cartridge for automatic temperature control, Non-return valve(s), Litter filter(s)
- Eccentric coupling(s), External thread, Cover plate(s), Silencer(s)
- Flexible length / can be shortened
- 1 spray function

Technical data

Flow properties

Flow-rate at 300 kPa
 Pressure loss with flow (0.2 l/s)

0.25 / 0.26 l/s
180 kPa

Technical properties


DN-size (nominal dimension) **DN 15**
 Hot water supply **max. +65°C**
 Working pressure **100 - 1000 kPa**
 Connection size **G1/2**
 Installation width **CC150± 15 mm**
 Projection **436 - 460 mm**
 Backflow prevention (EN1717) **EB**
 Material **Brass**




Regulations

EN standard **EN 1111, EN 1112, EN 1113**
 Noise class **I (ISO 3822)**

Approvals and Declarations

KIWA SE **1664**
 EPD **S-P-07819**

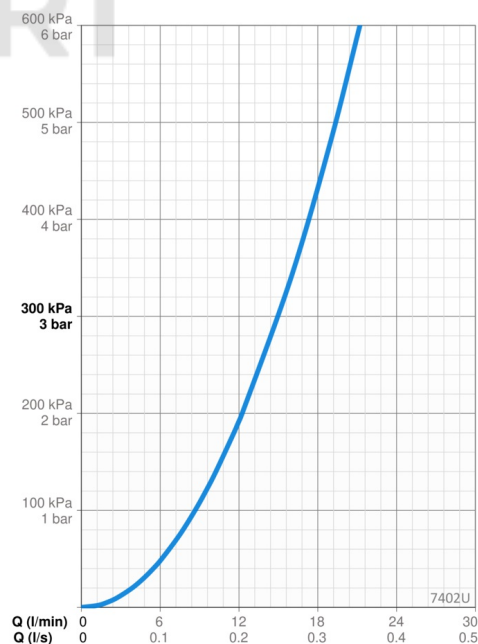


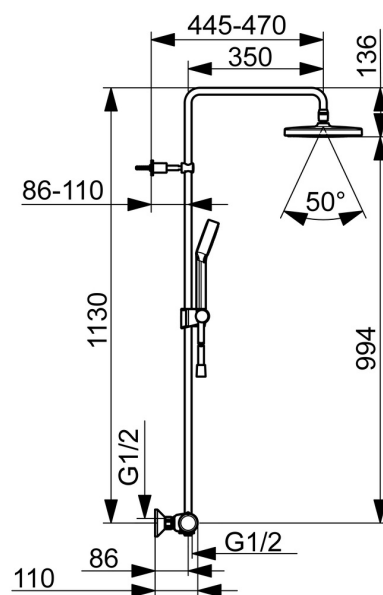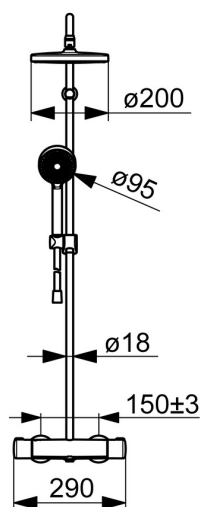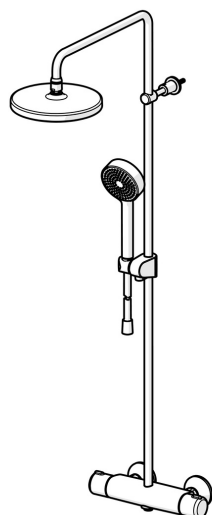

Spare parts



SP7401

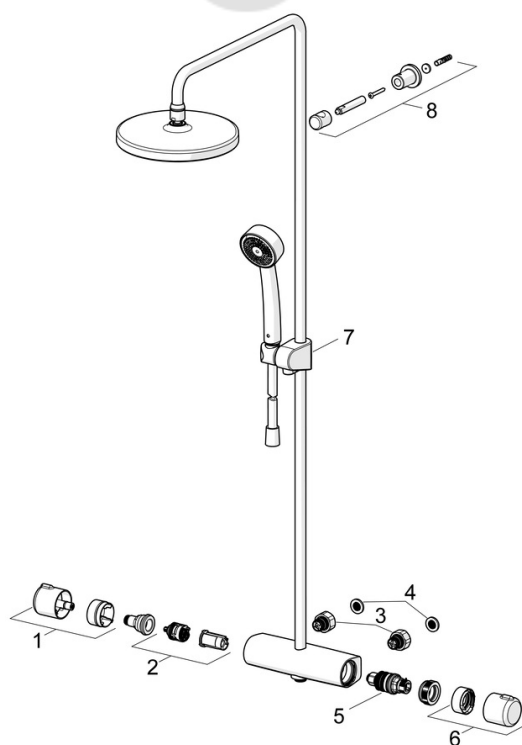

	Name	Code
01	Flow control handle	602452V
02	Diverter and cartridge	601278V
03	Combiner	602438/2
04	Filter sealing, G3/4, DN20	178375V
05	Thermostatic cartridge	178780V
06	Temperature control handle	602431V
07	Slide for shower rail	601189V
08	Shower pipe holder	1001314V