


NS/PF



Further product
documentation

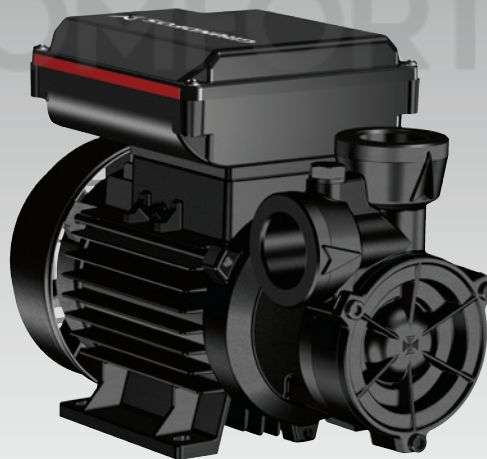

net.grundfos.com/qr/i/99057323

be
think
innovate

GRUNDFOS 



Max. bar =



= Min./Max.
0 °C / +35 °C



Min./Max. 0 °C / +40 °C



NS



PF 1-30 Max. 6 bar
PF 2-50 Max. 10 bar



= Min./Max.
0 °C / +35 °C




= Min./Max.
-10 °C / +50 °C



Min./Max. 0 °C / +40 °C




PF

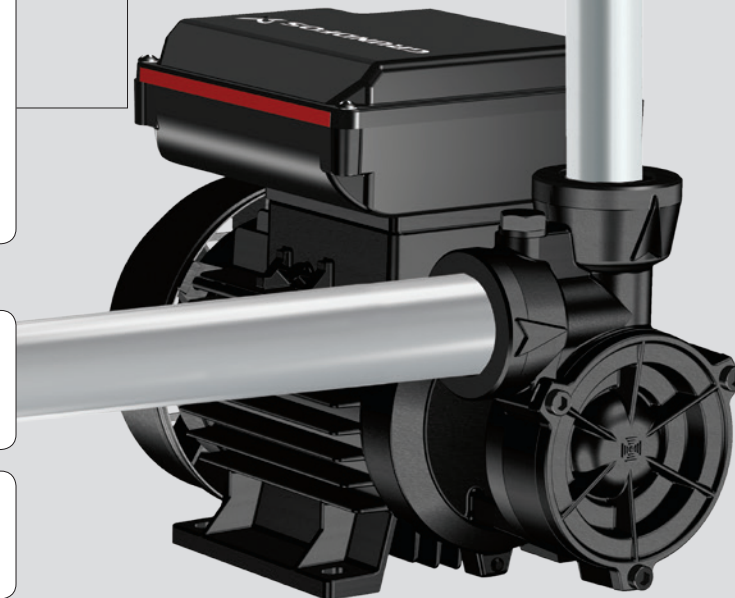



1A

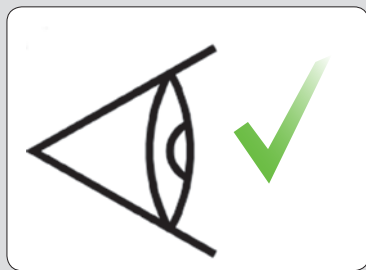


1B





NS


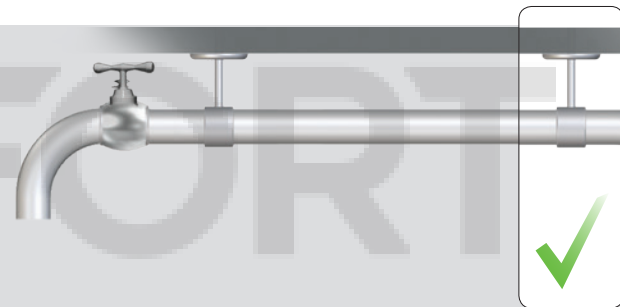


PF






2A

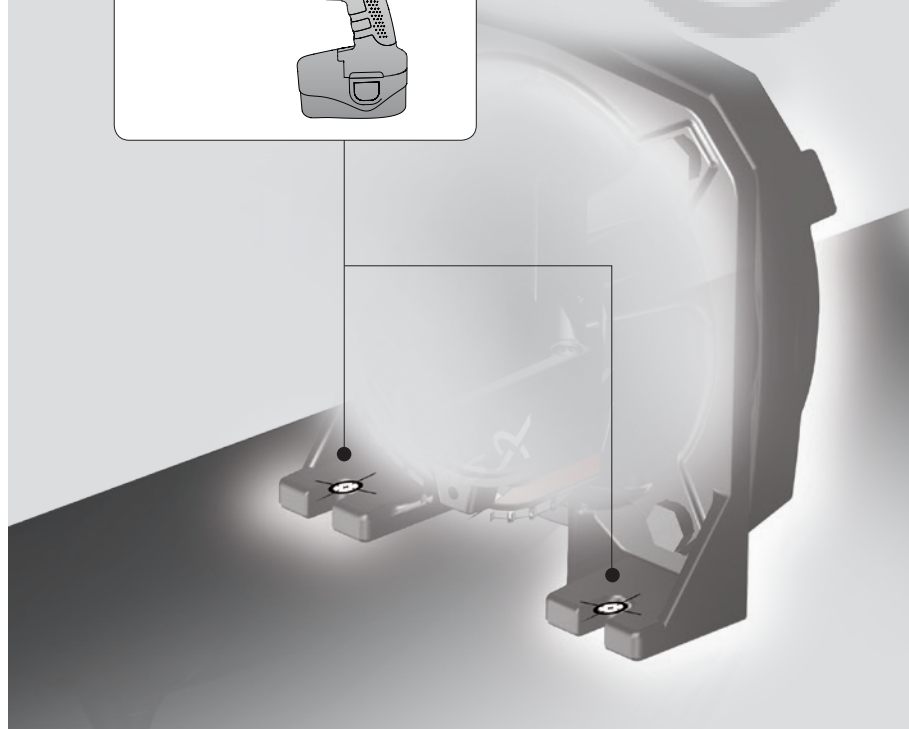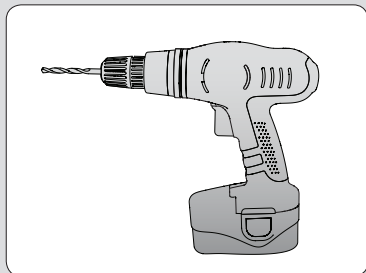


3A

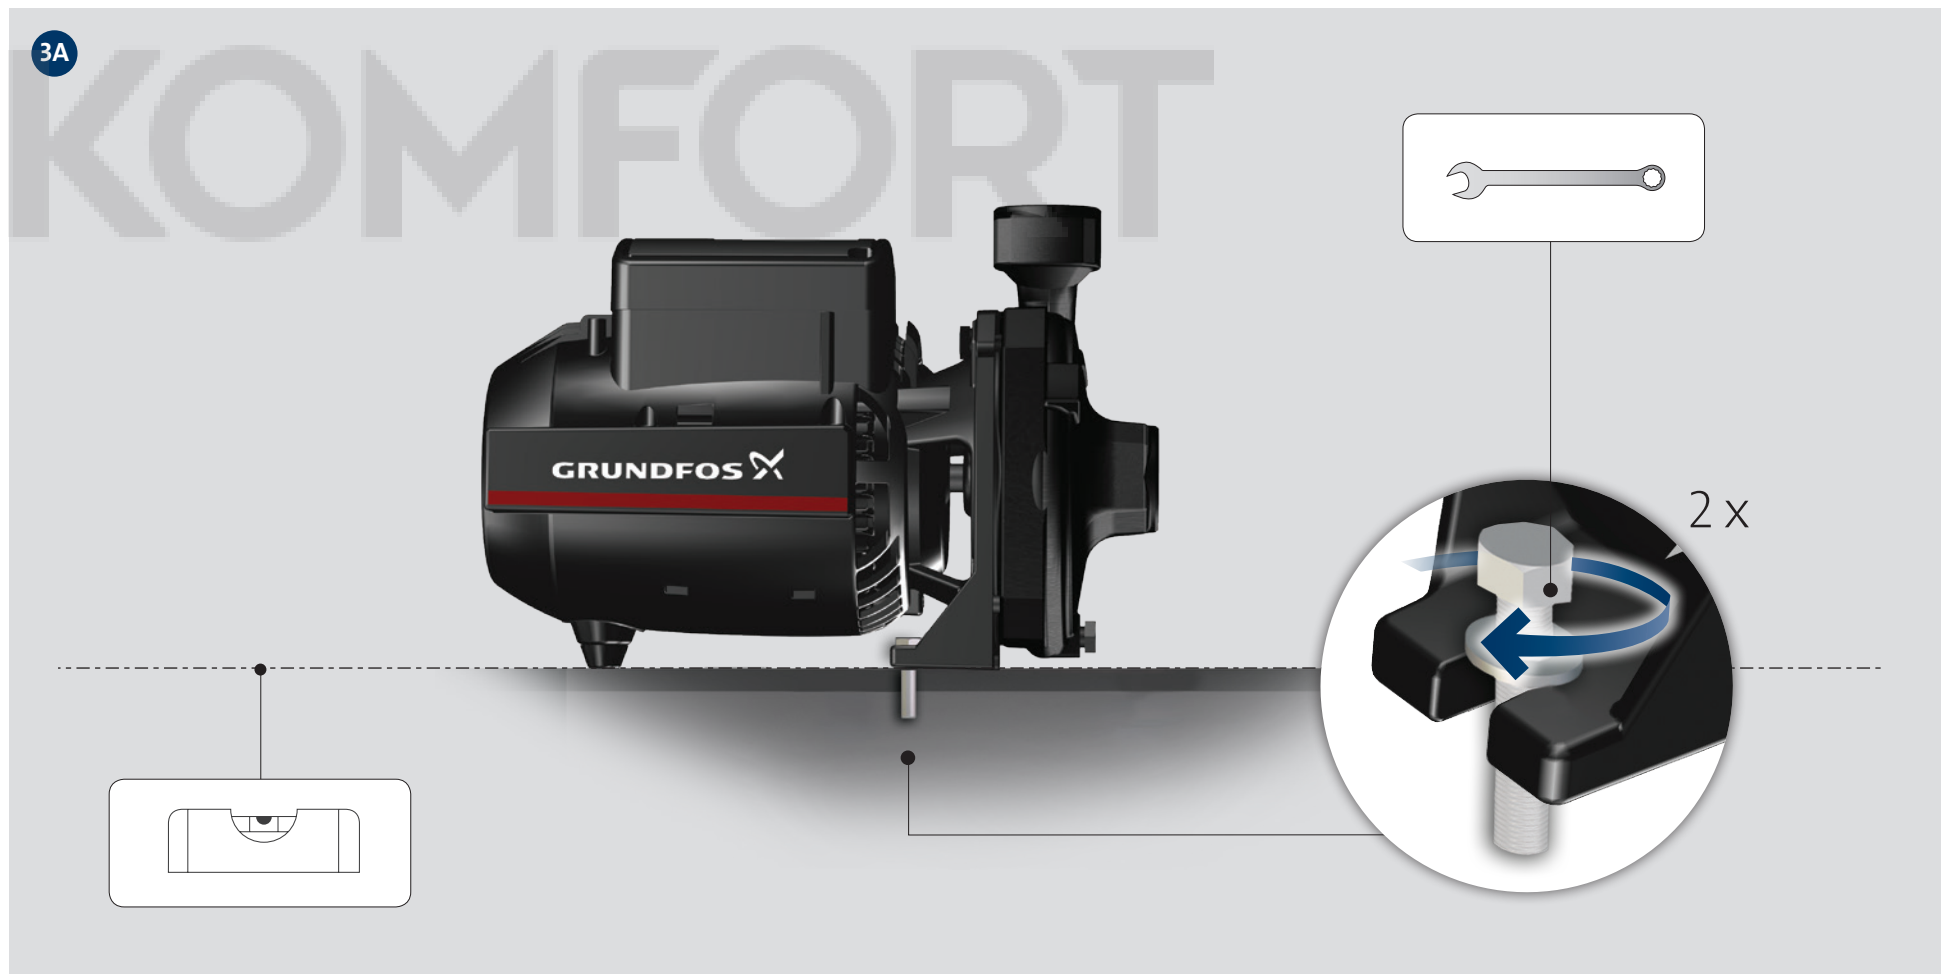





2B

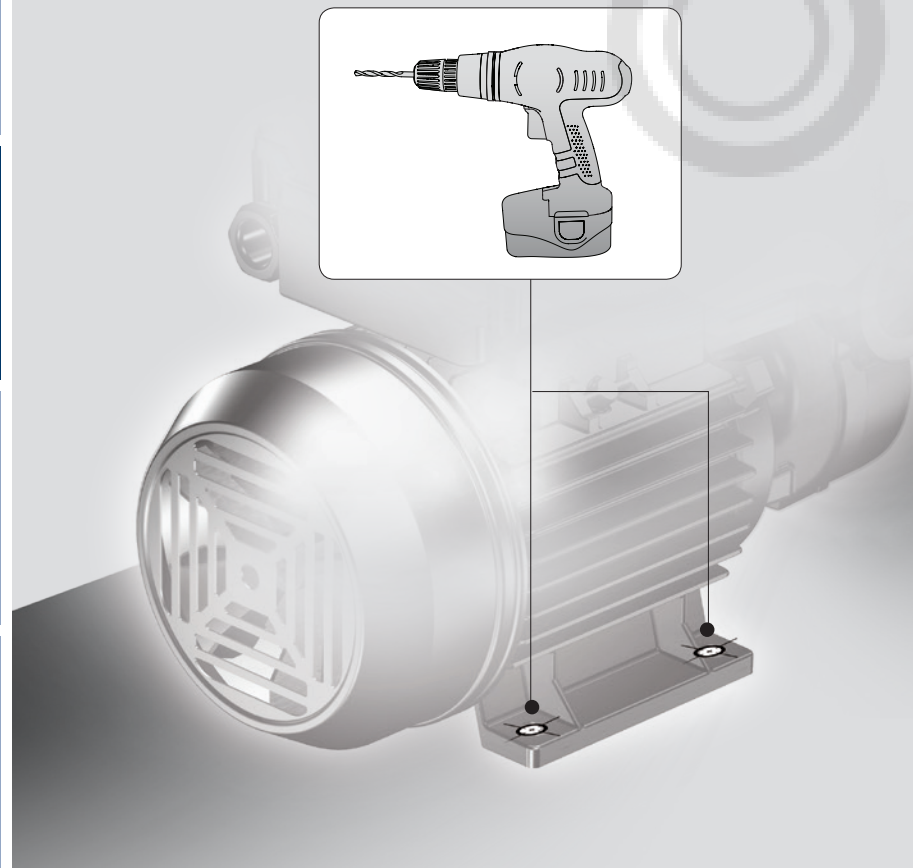


3B


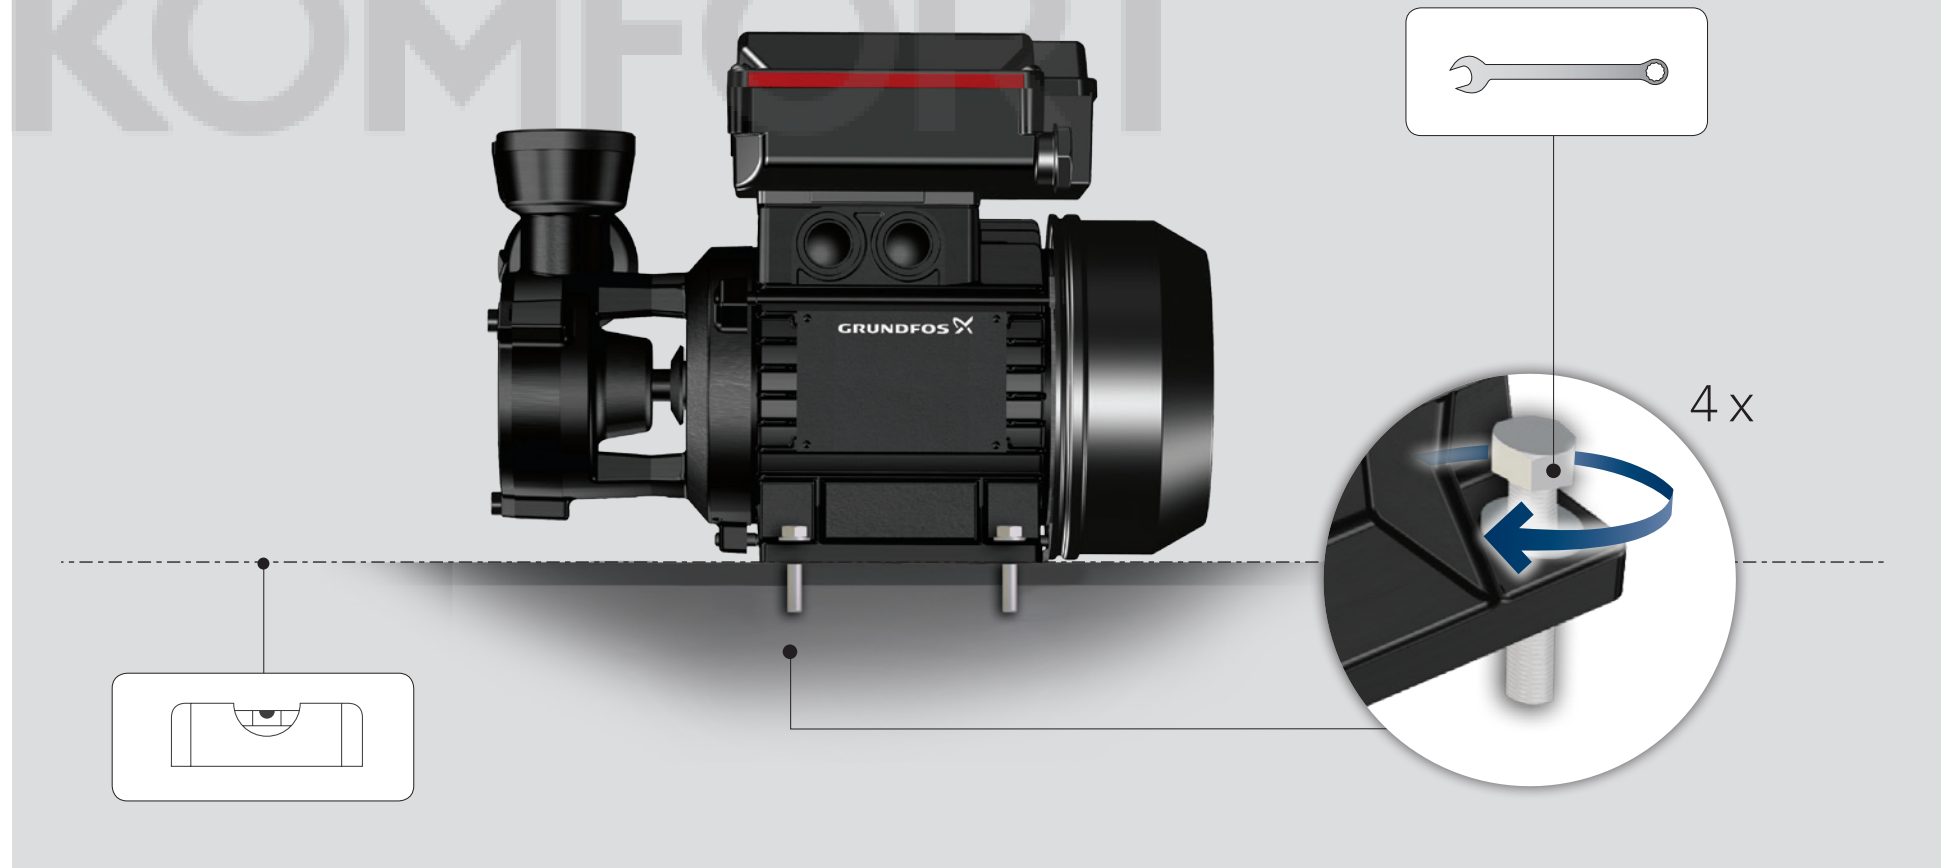


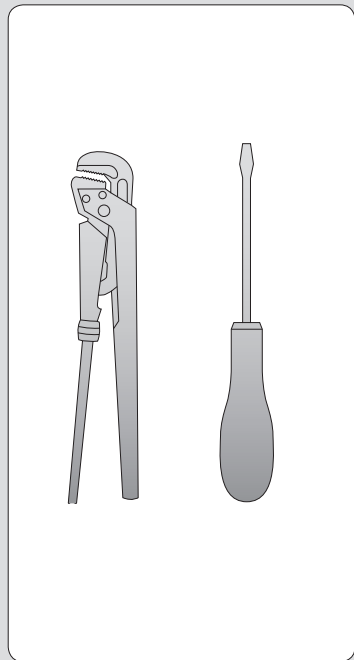


4A

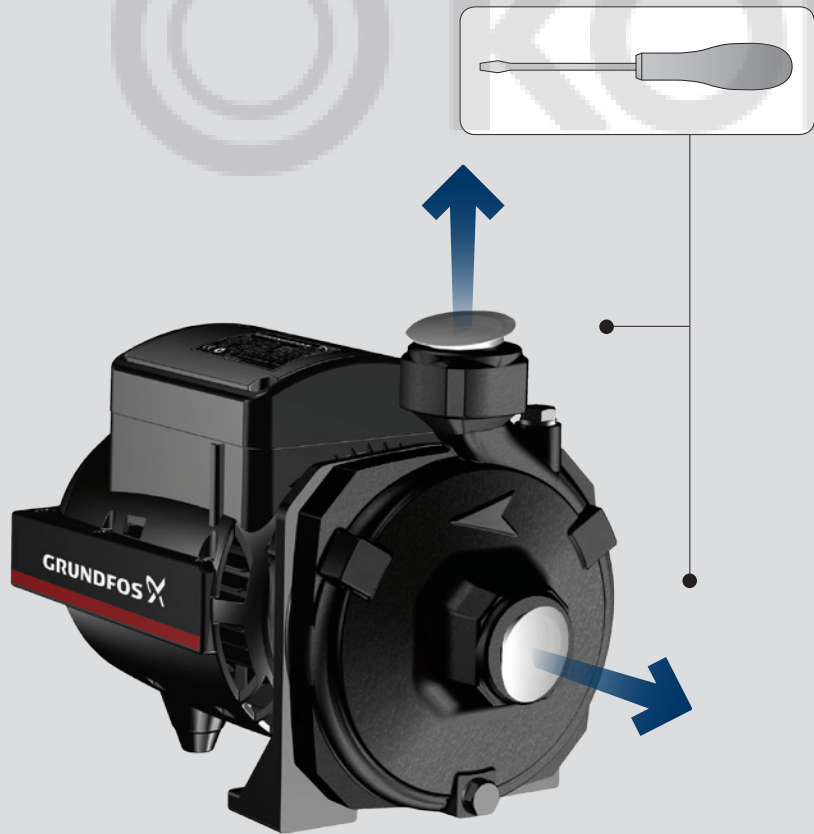


5A

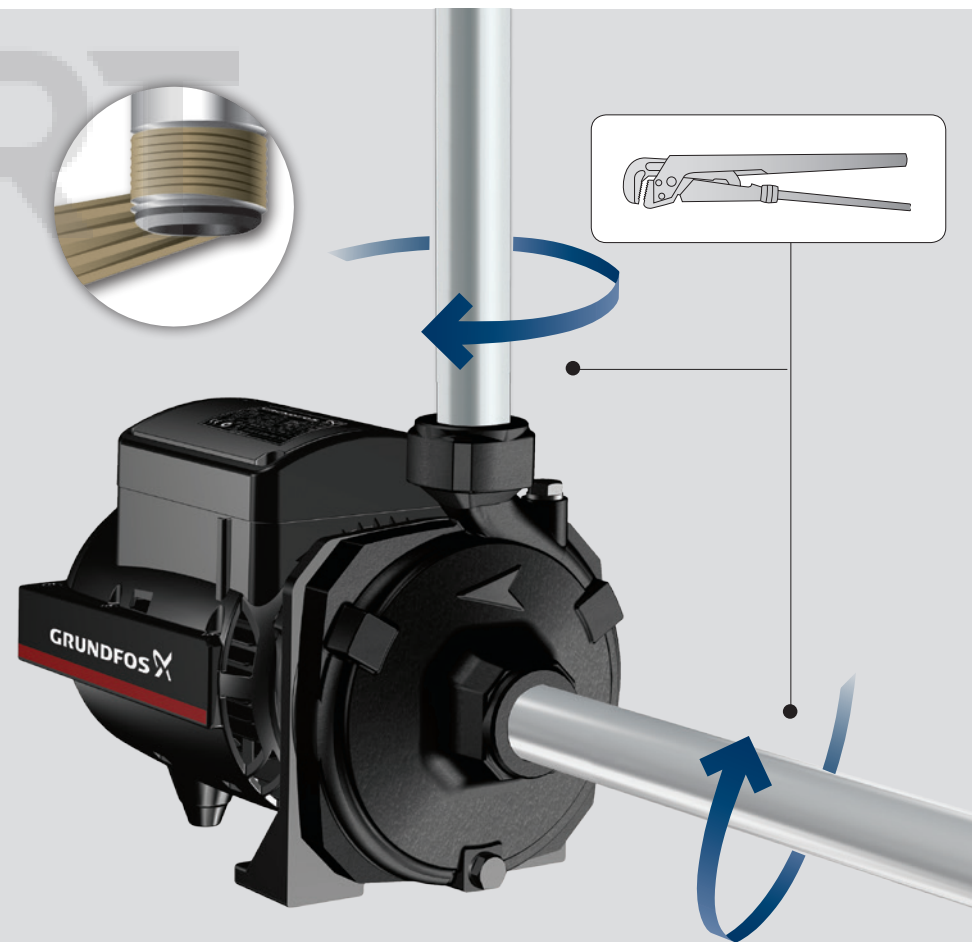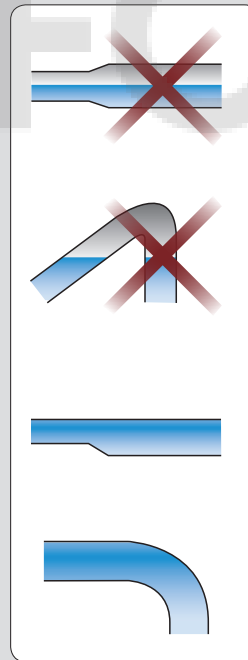


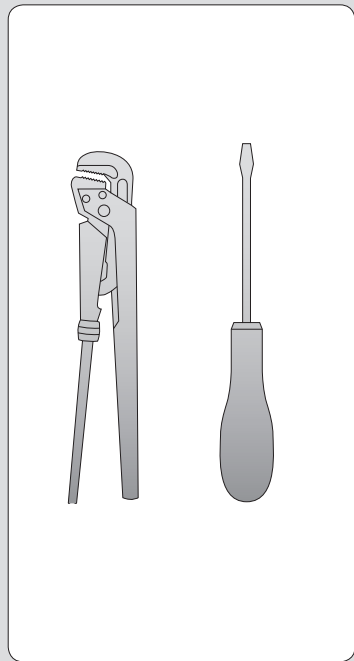

4B

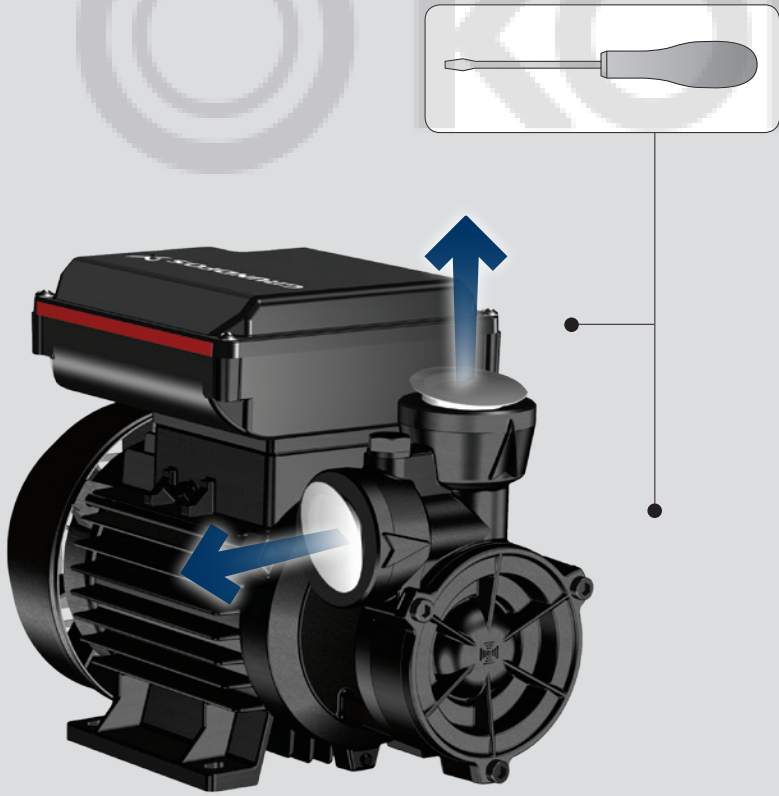

5B

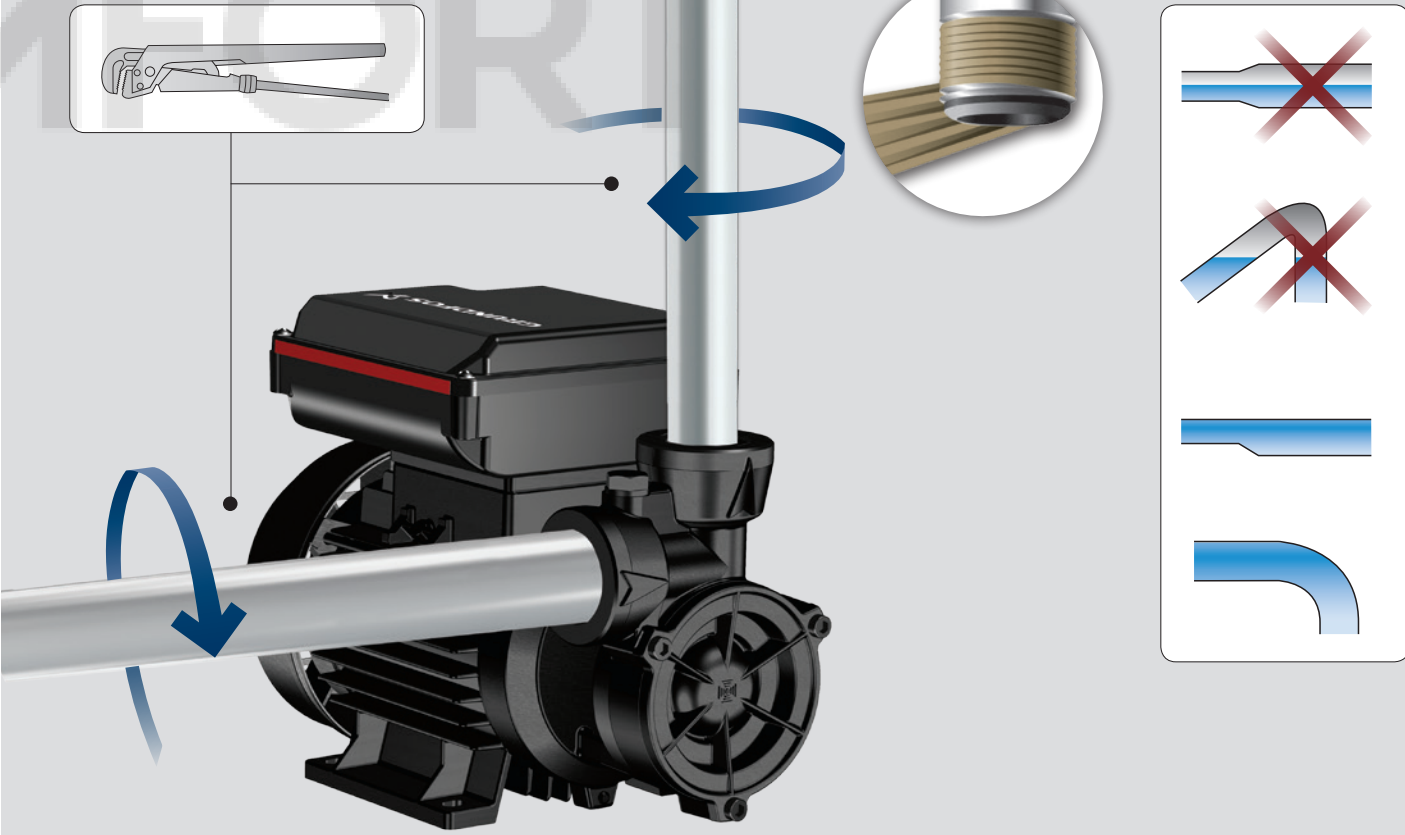



6A



7A








8A






9A



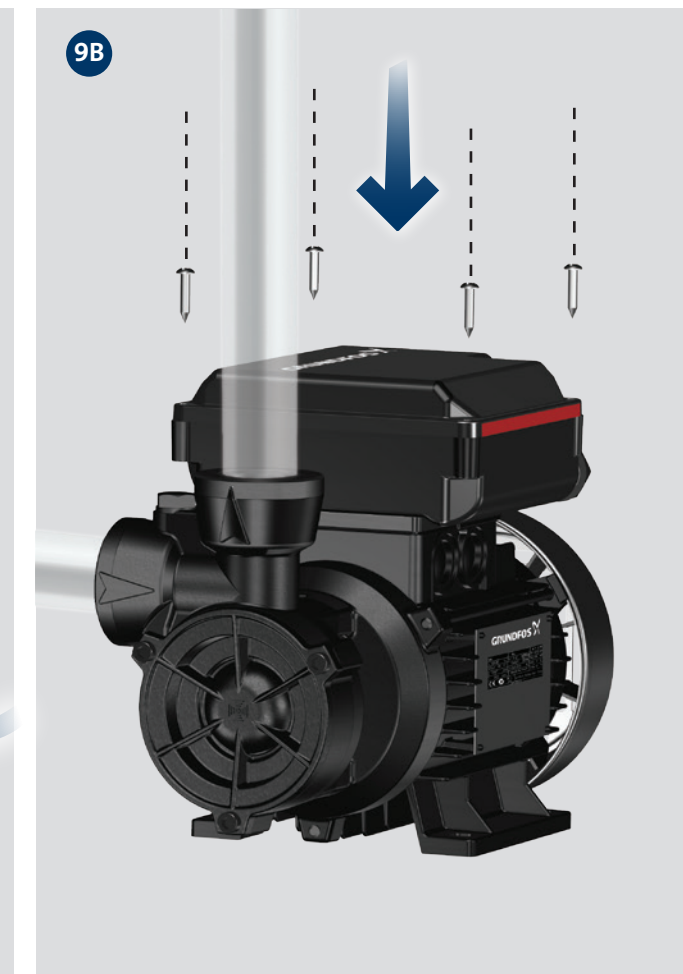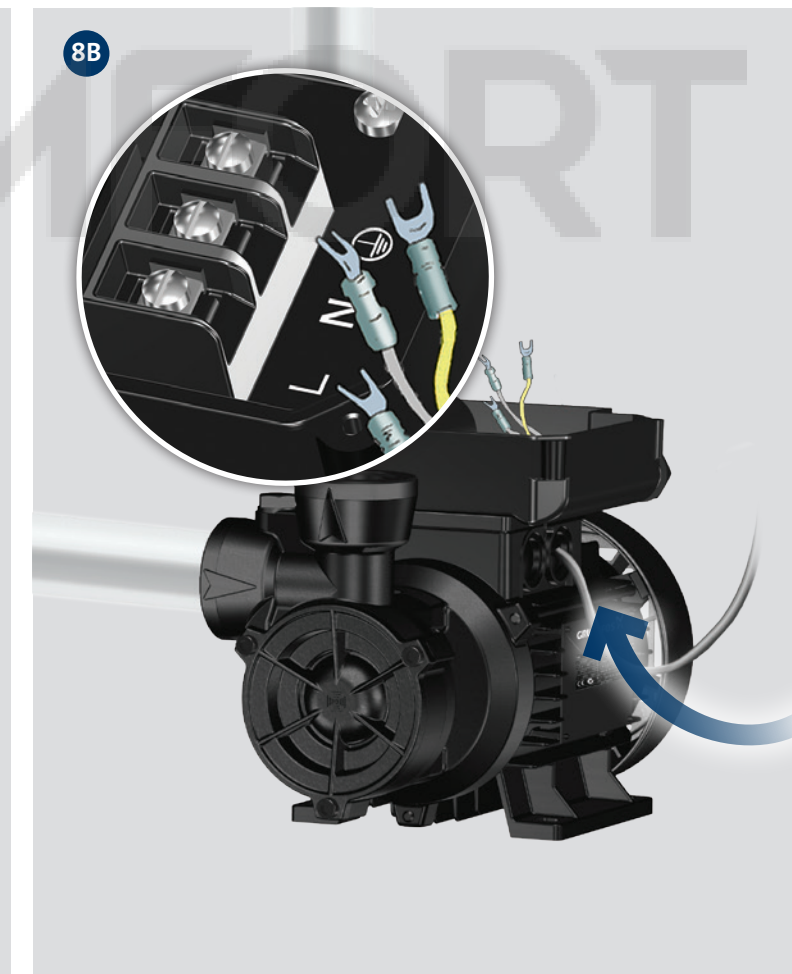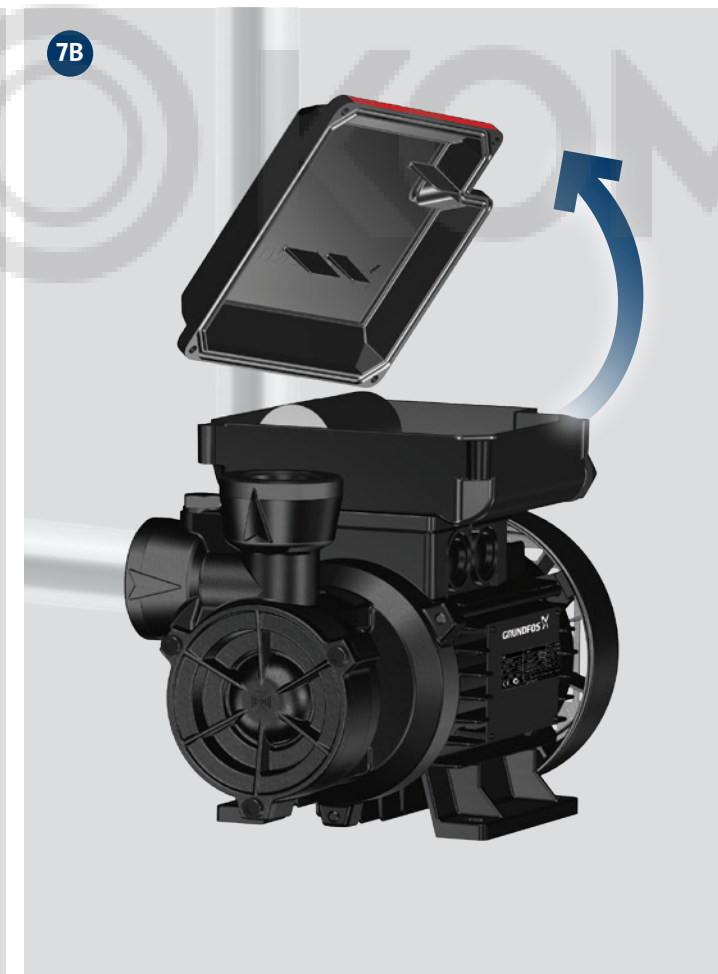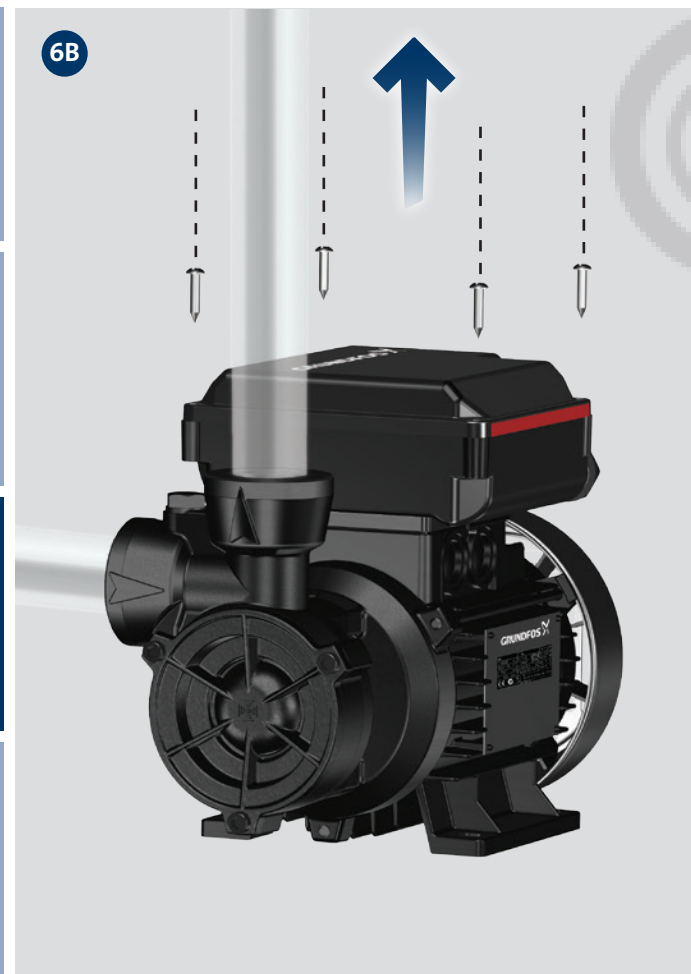

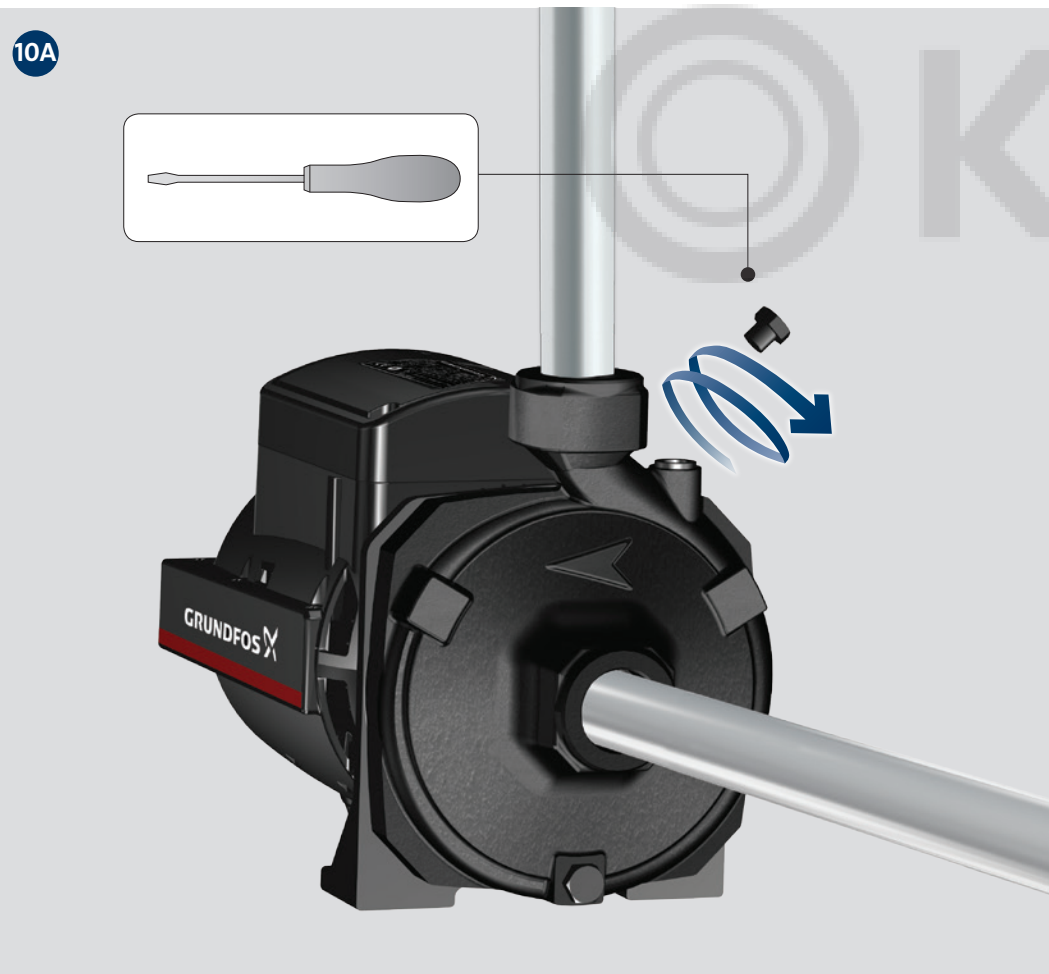


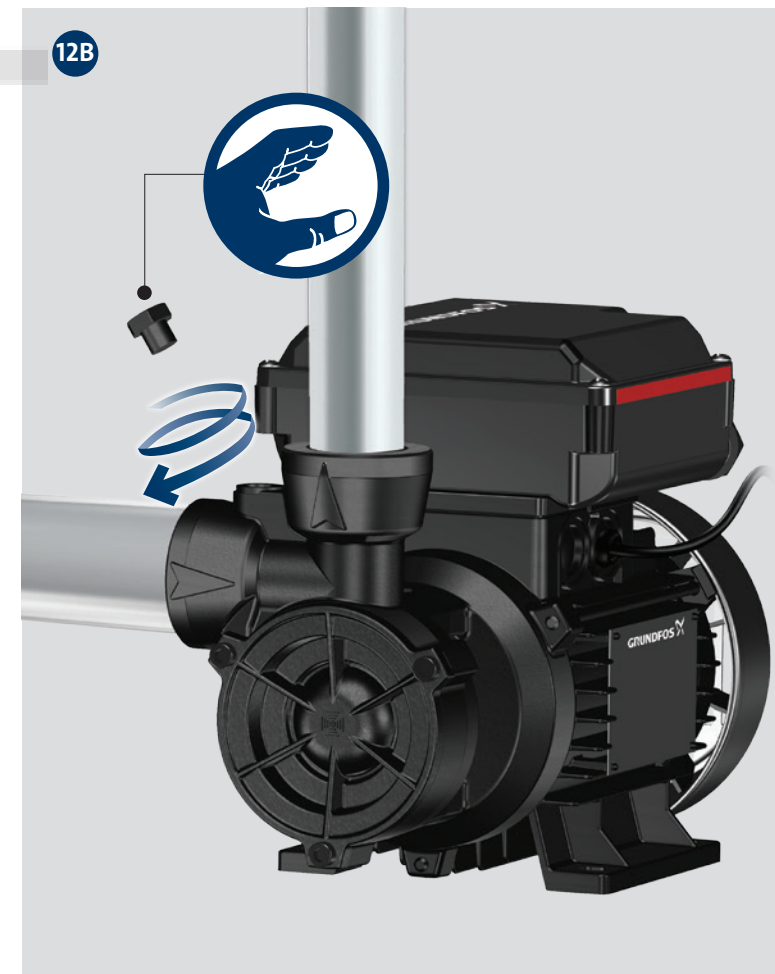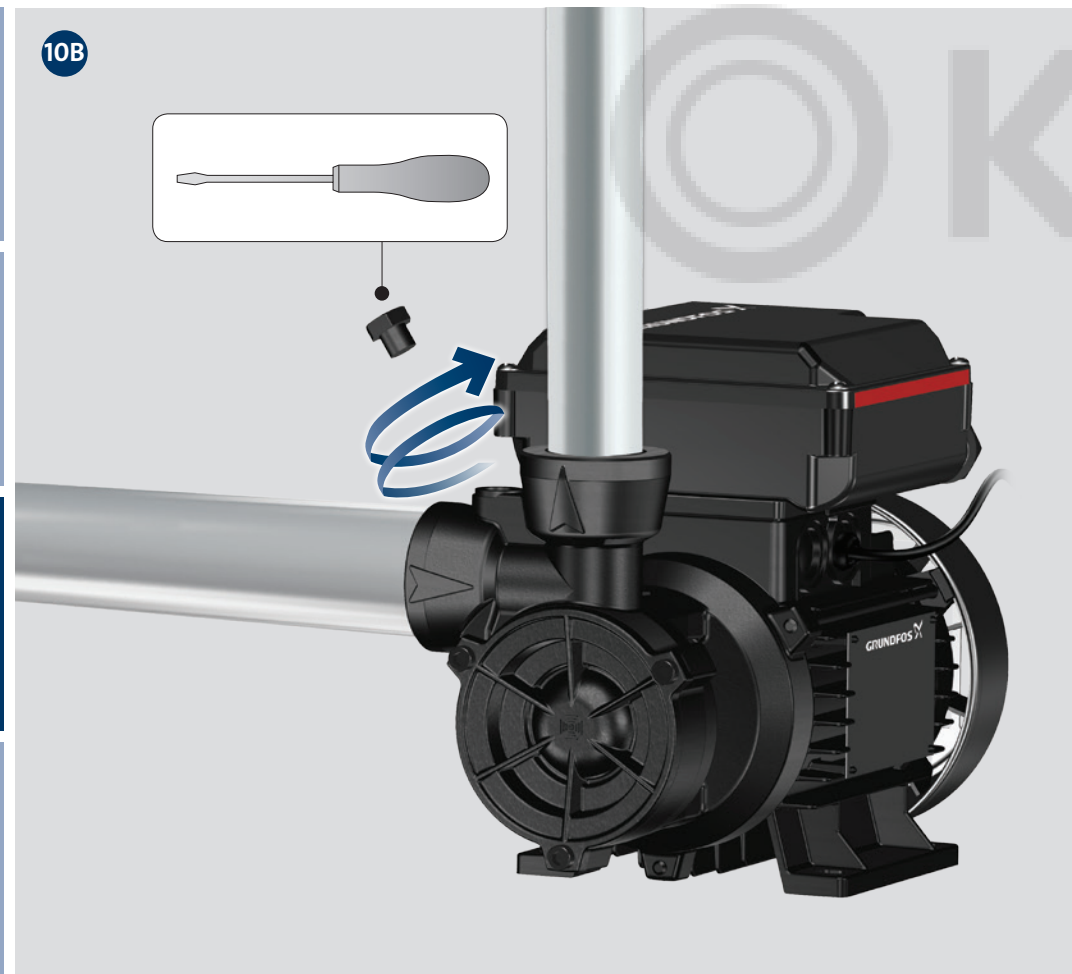


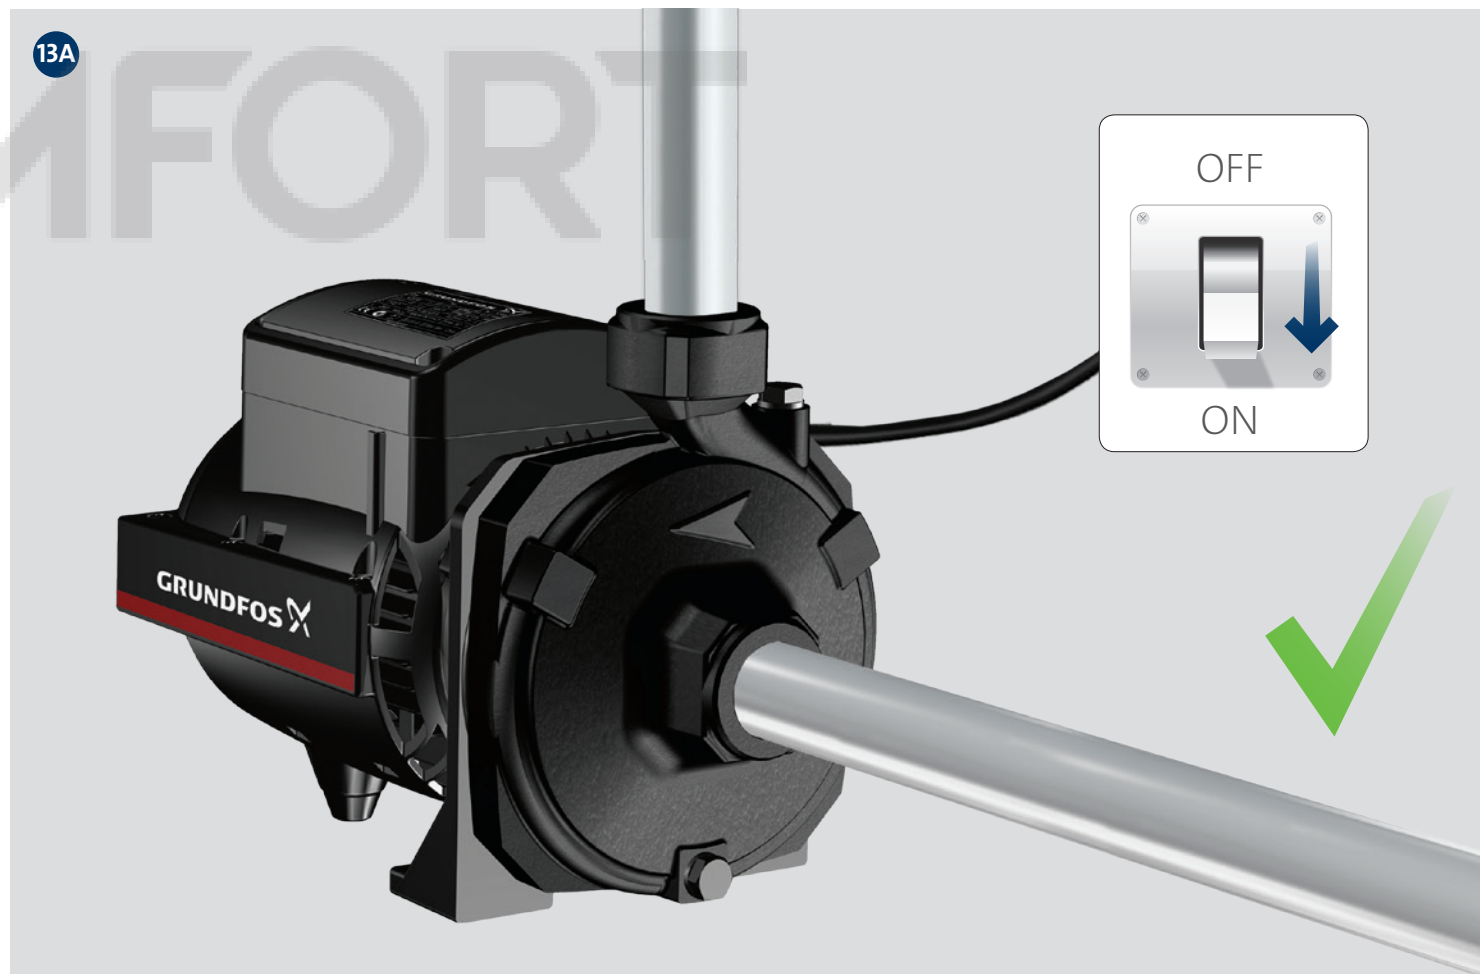




Max. $\varnothing < 1 \text{ mm}$
/ 0.04 inch



13B

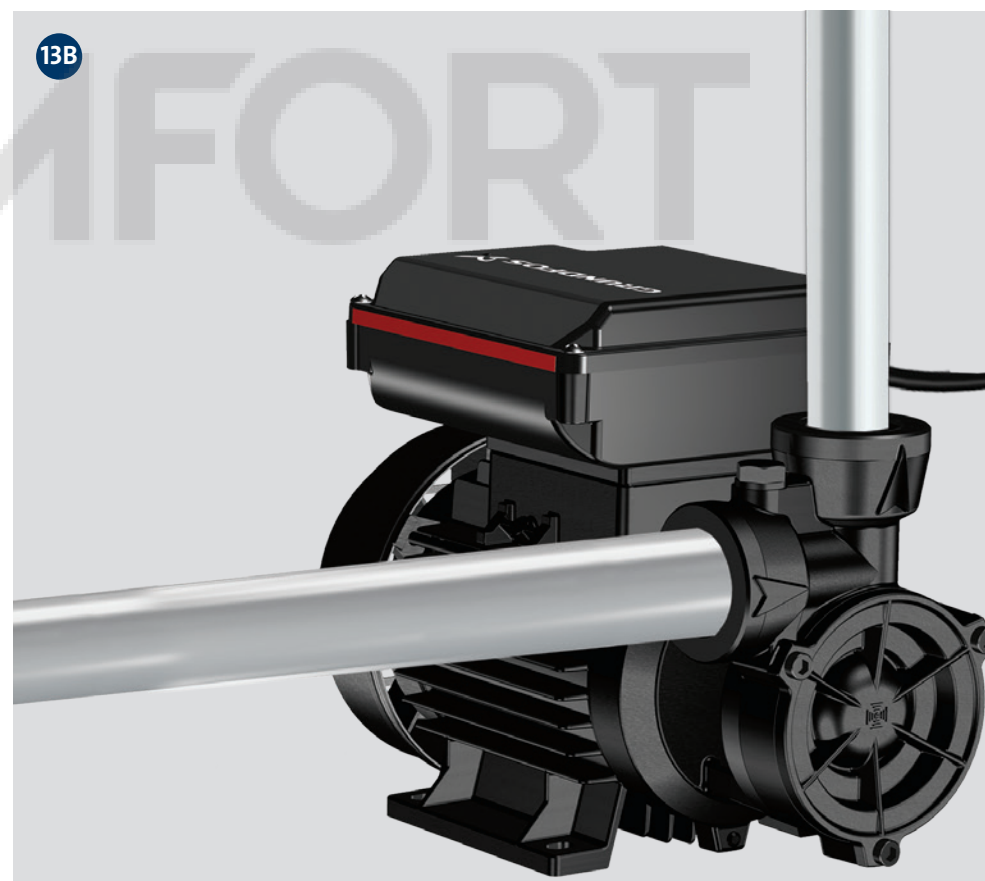

be think innovate

© KOMFORT

98911576 0216

ECM: 1178728

GRUNDFOS Holding A/S
Poul Due Jensens Vej 7
DK-8850 Bjerringbro
Tel.: +45 87 50 14 00
www.grundfos.com

GRUNDFOS 

The name Grundfos, the Grundfos logo, and be think innovate
are registered trademarks owned by Grundfos Holding A/S
or Grundfos A/S, Denmark. All rights reserved worldwide.