


ESBE SERIES CUA110





Series CUA110



LVD 2006/95/EC
EMC 2004/108/EC
RoHS 2002/95/EC




1

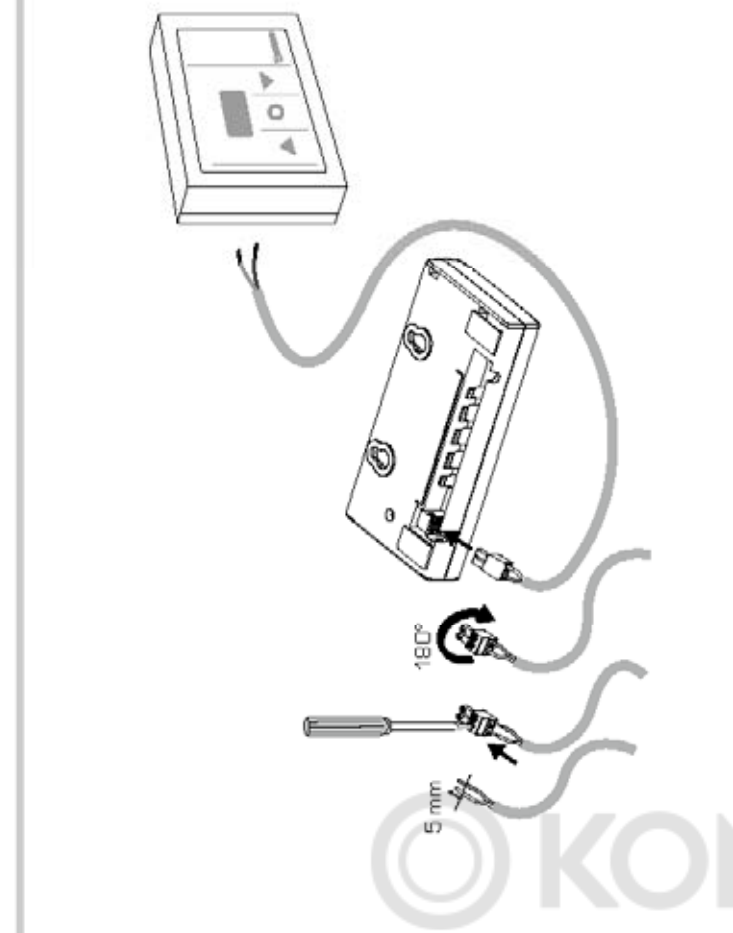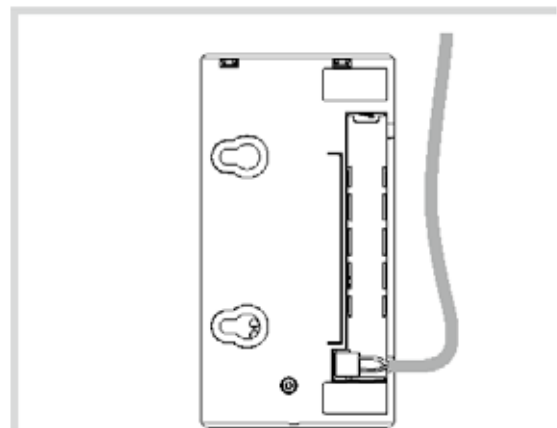


2




1

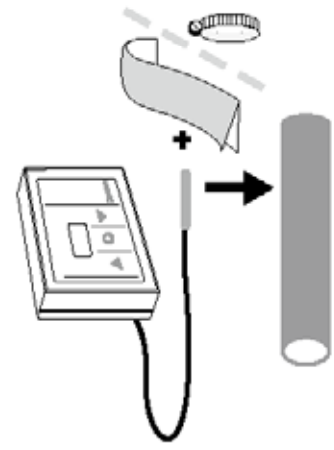

2

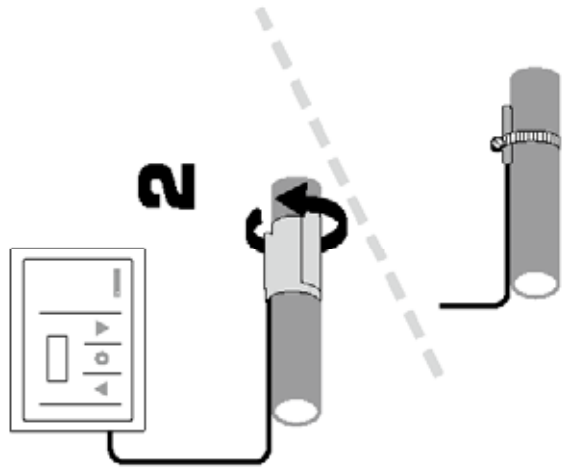


3

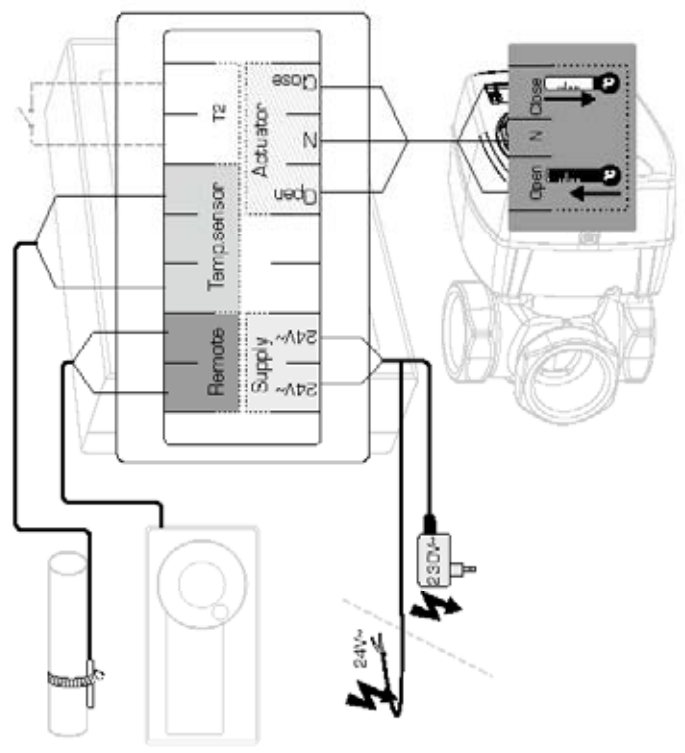




KOMFORT

4

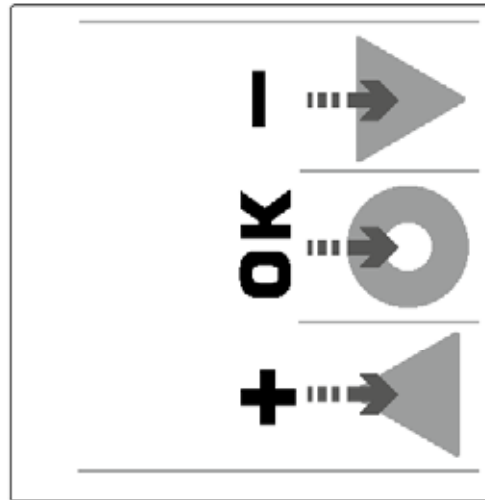

KOMFORT

5

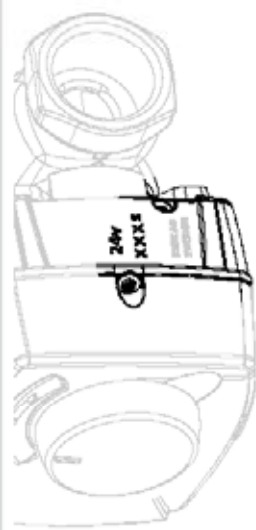

XXX	t (s)
015	< 25
030	26 - 45
060	46 - 90
120	91 - 180
240	181 - 360
480	> 360



www.esbe.eu

Model: 9814.03 93 • Revizija: 9813.03 B • Rev. 1.0/12



SERIES CUA110




NOT IN HYDRAONIC SYSTEM CONTROL

6



▲ = MAX °C

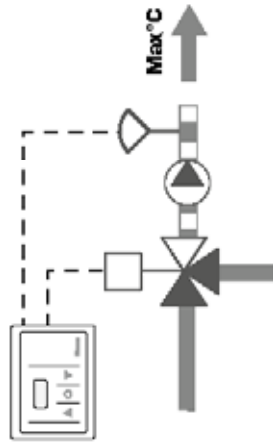

- 50 °C
- ~40 - 50 °C
- ~60 - 80 °C

40 °C

4s

OK

MAX
50

OK

+

-

55

OK

20s

OK



4s

40 °C

7



● = MIN °C

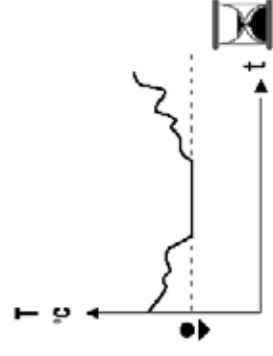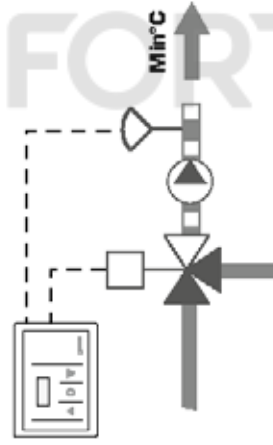

- 5 °C
- ~5 - 25 °C
- ~5 - 25 °C

40 °C

4s

OK

+

50

MIN
5

OK

+

-

10

OK

20s

OK

4s




40 °C





8



i

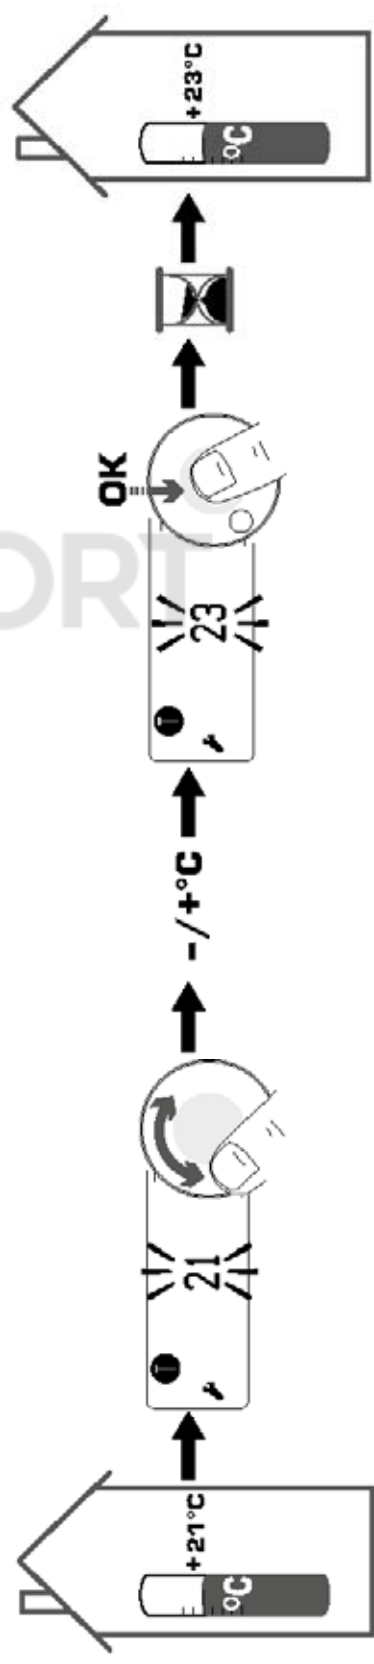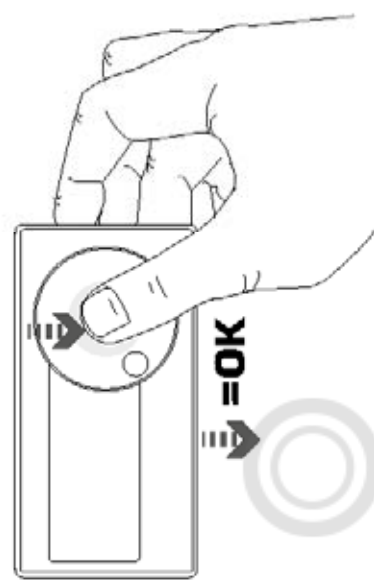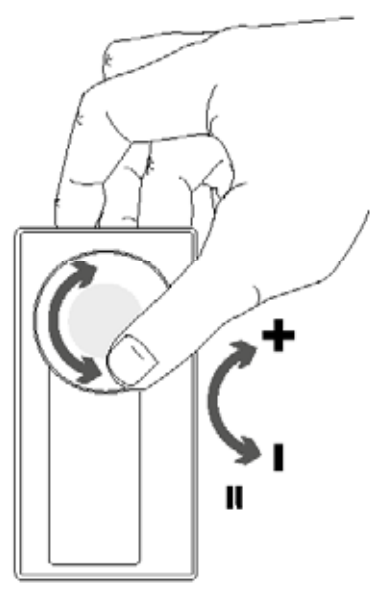

© KOMFORT

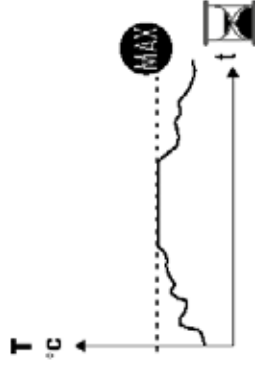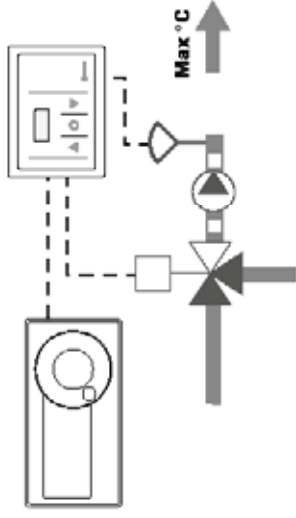

	50 °C
	~40 - 50 °C
	~60 - 80 °C
	60 °C

MAX

21

4s

MIN C

MAX



OK

50

55

-/+°C

OK

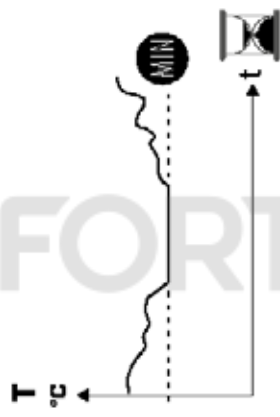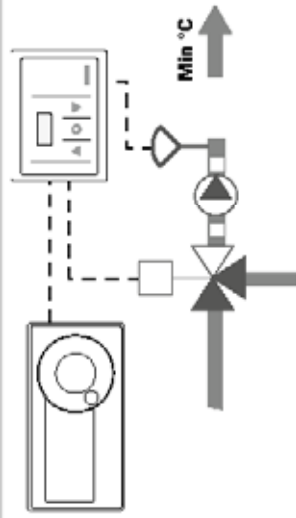

	5 °C
	~5 - 25 °C
	~5 - 25 °C
	~5 - 25 °C

MIN

21

4s

MIN C

MAX

OK




5

10

-/+°C

OK


© KOMFORT

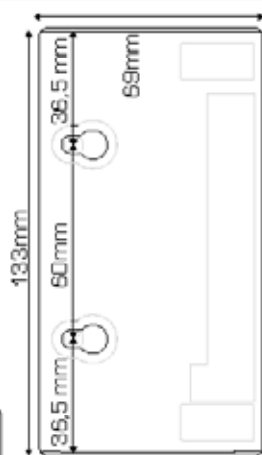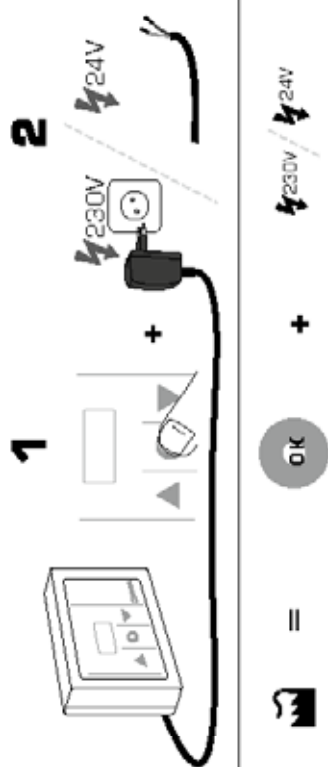





C

i

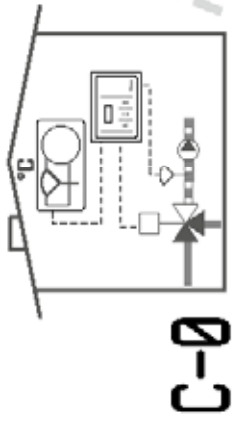

C-0



C-1

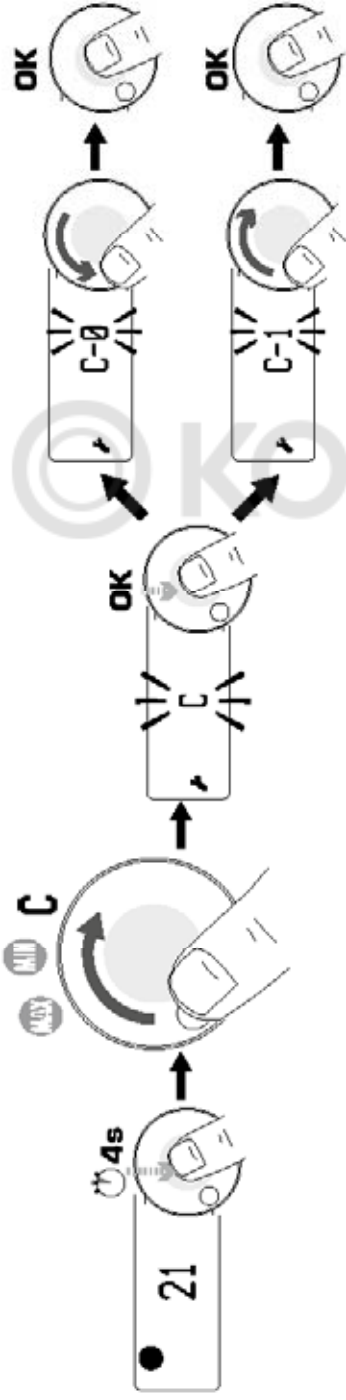

© KOMFORT



T2

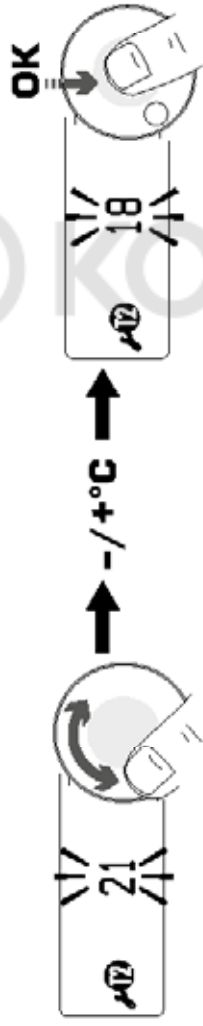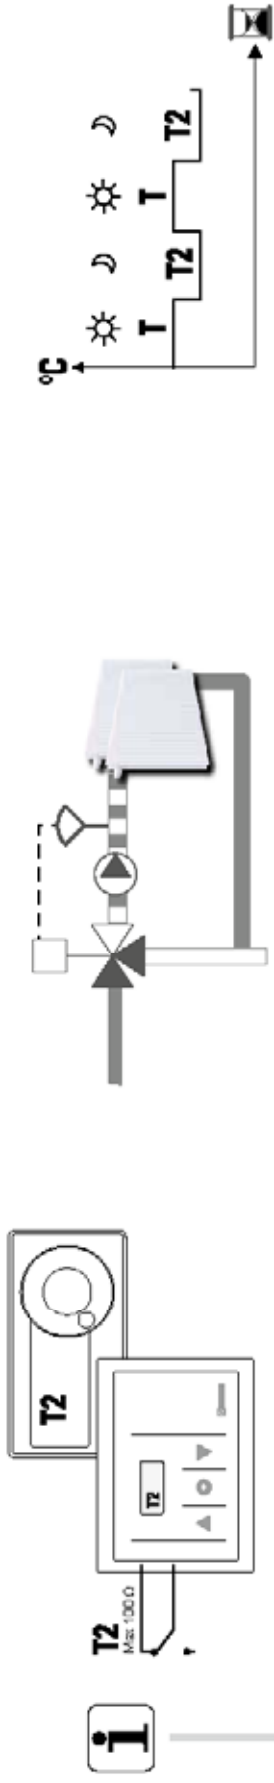

T

