


ESBE SERIES CUA110





Series CUA110



LVD 2006/95/EC
EMC 2004/108/EC
RoHS 2002/95/EC




1

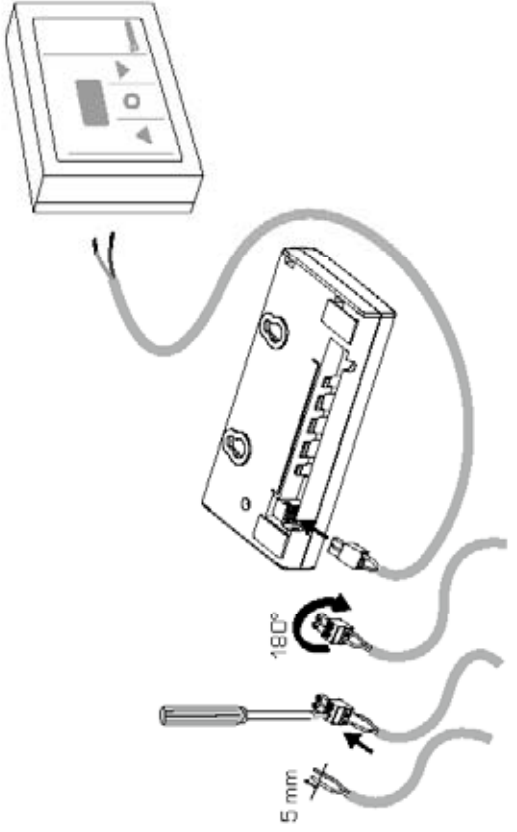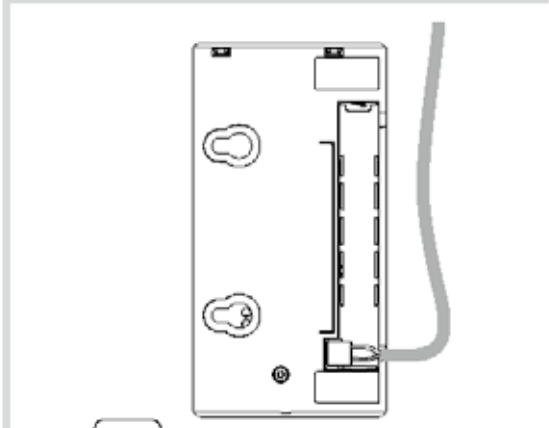


2




1

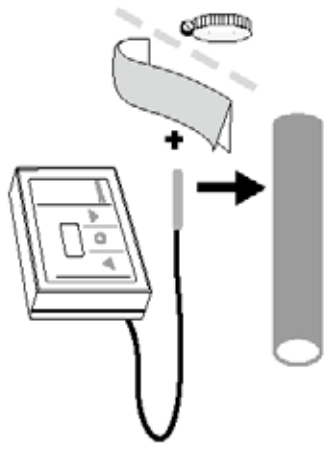


2

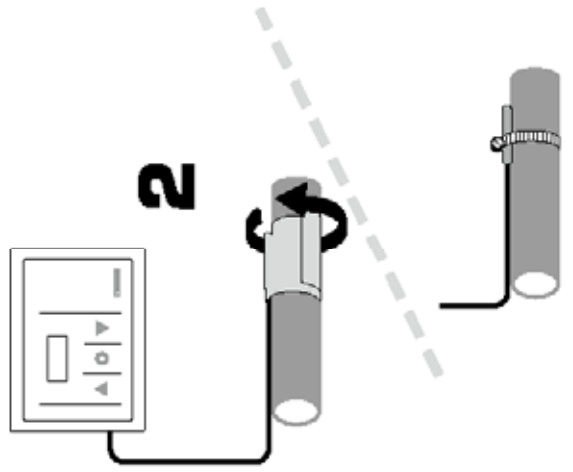

3

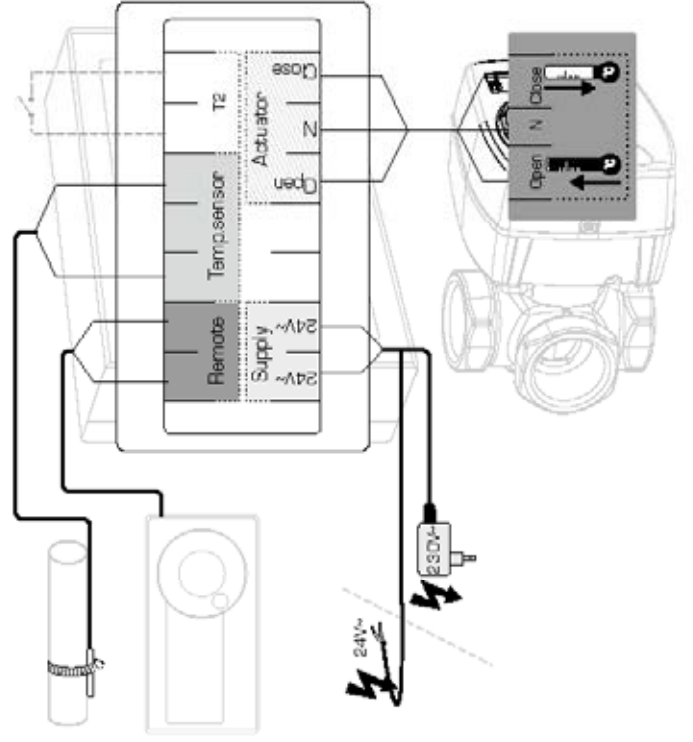



4

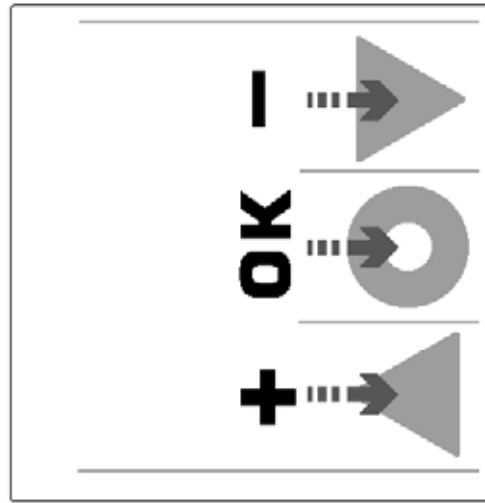

www.esbe.be

Model: 9814.03.93 • Revizija: 9813.03.B • Rev. 1.0/12

5



| XXX | t (s) |
|-----|-----------|
| 015 | < 25 |
| 030 | 26 - 45 |
| 060 | 46 - 90 |
| 120 | 91 - 180 |
| 240 | 181 - 360 |
| 480 | > 360 |



SERIES CUA110




NOT IN HYDRAONIC SYSTEM CONTROL

6



▲ = MAX °C

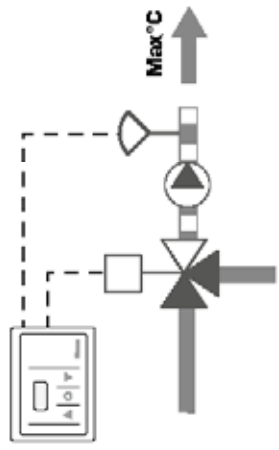

- 50 °C
- ~40 - 50 °C
- ~60 - 80 °C

4s
 → 40 °C

MAX
 50 °C

55 °C

20s



4s

40 °C

7



● = MIN °C

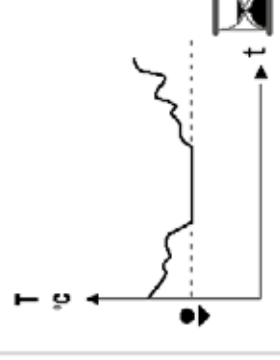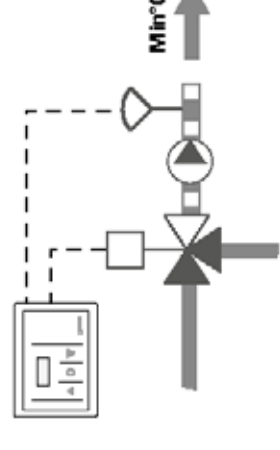

- 5 °C
- ~5 - 25 °C
- ~5 - 25 °C

40 °C

50 °C

MIN
 5 °C

10 °C

20s

4s




40 °C





8







i

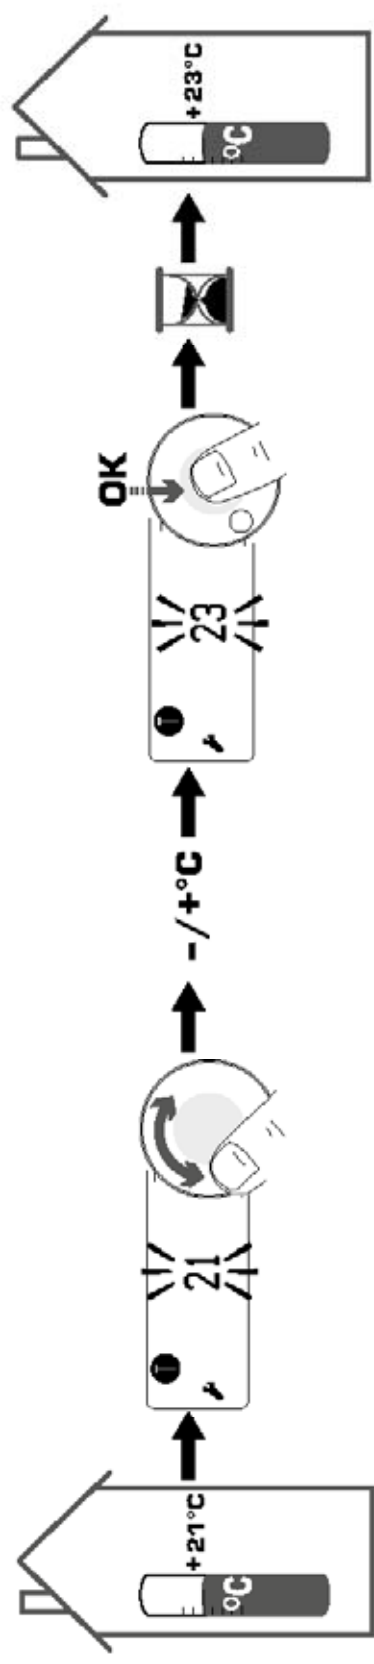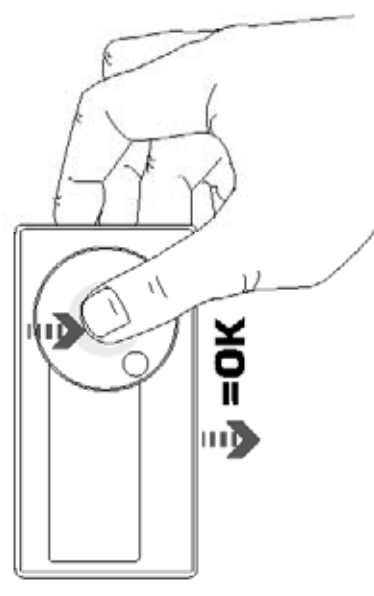
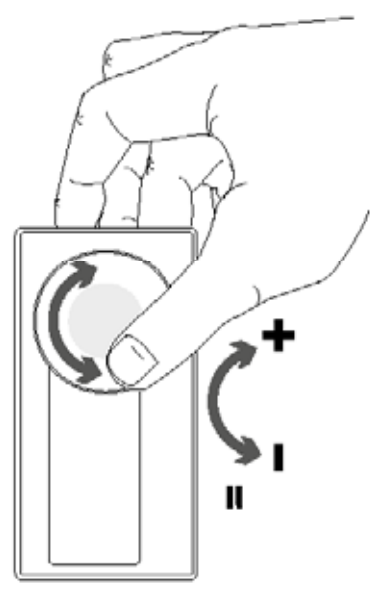



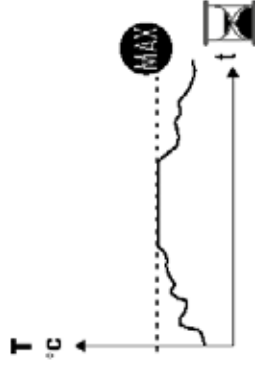
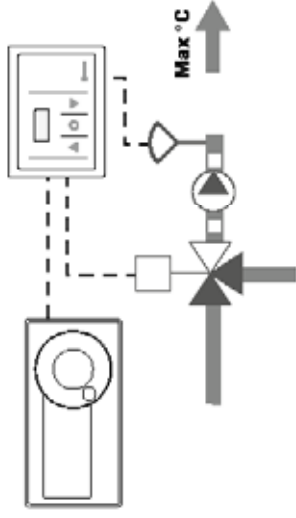


| | |
|--|-------------|
| | 50 °C |
| | ~40 - 50 °C |
| | ~60 - 80 °C |
| | 60 °C |

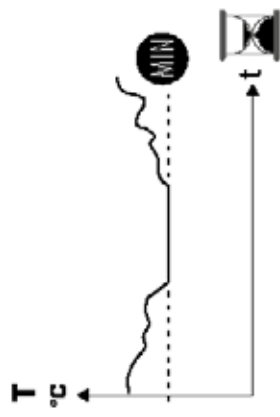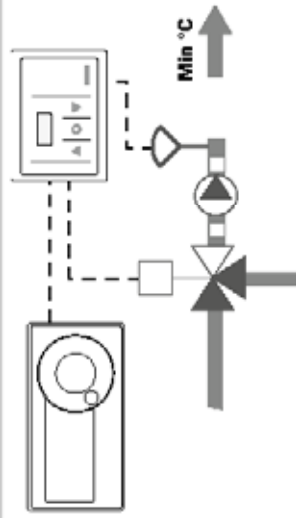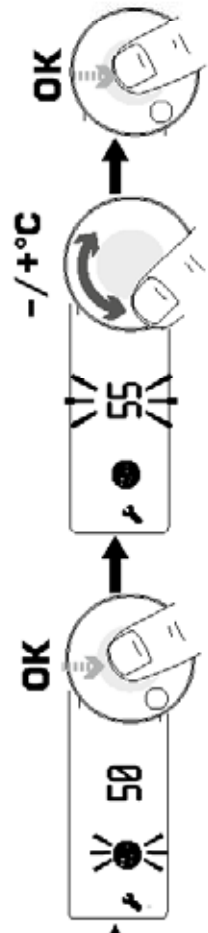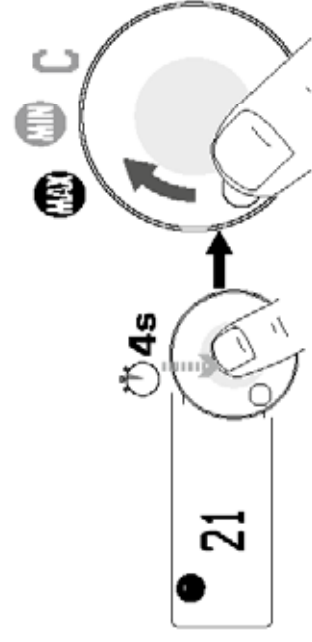

| | |
|--|------------|
| | 5 °C |
| | ~5 - 25 °C |
| | ~5 - 25 °C |
| | ~5 - 25 °C |

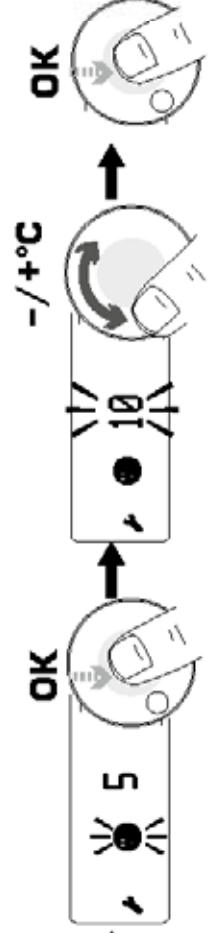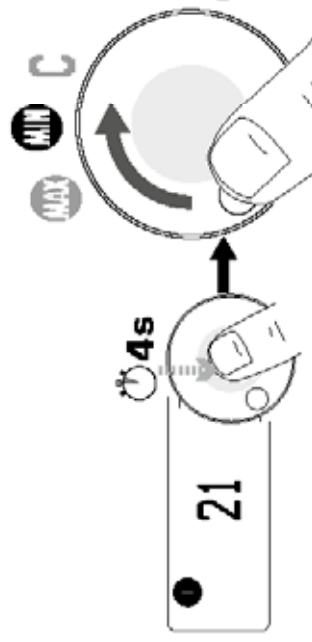


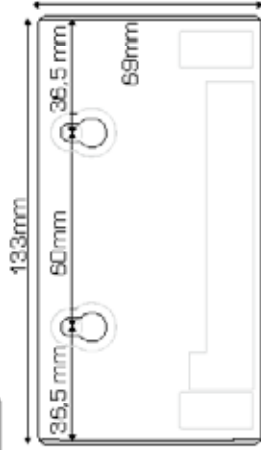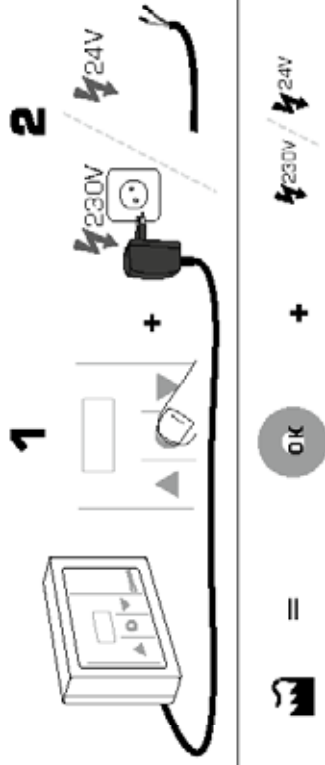





C

i










C-0

C-1

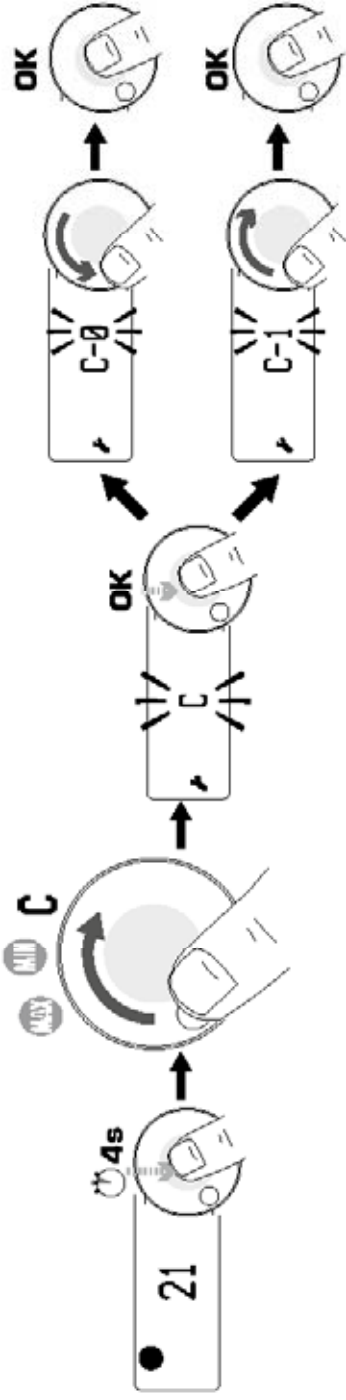



T2

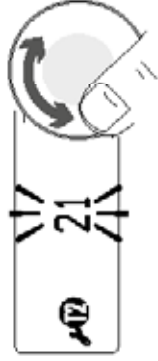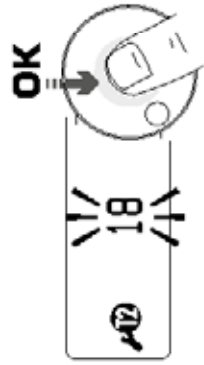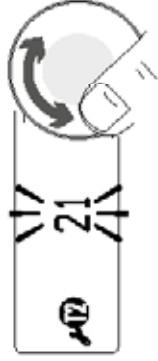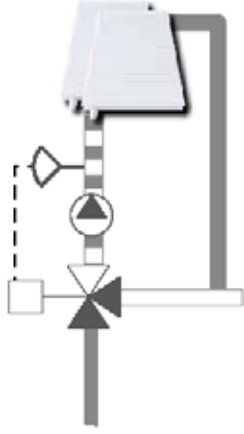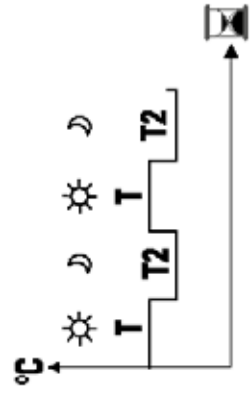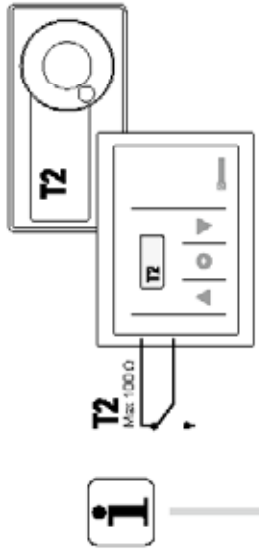

T

