

Technical data sheet

Type 223

EB anti-pollution non-return valve

01 System

Applications and special features



- Operates in any position
- Minimum head loss
- Particularly suitable for pressure water systems.
- Does not generate hammering
- Closing system: axial guiding with return spring
- Excellent sealing at high as well as at low pressure.
- Drilled bosses 1/4" brass plug
- Incrustation resistant materials

Technical description

DN	PFA (bar)	PS (bar)				Cat.	References	Vvs-nr
		L1	L2	G1	G2			
1/2	16	16	16	16	16	3.3	149B 2890	
3/4	16	16	16	16	16	3.3	149B 2891	
1	16	16	16	16	16	3.3	149B 2892	
1 1/4	16	16	16	X	16	3.3	149B 2893	
1 1/2	16	16	16	X	16	3.3	149B 2894	
2	16	16	16	X	16	3.3	149B 2895	

Important notice:

The indicated pressure for the different categories of fluids (L1/L2/G1/G2) is under no condition a guarantee of use. Therefore, it is essential to validate the use of products under given operating conditions.

The operating instructions are available on our web site www.danfoss-socla.com or by requesting from our sales department.

- **Connection** : Male/male, BSP thread
- **Permissible operating pressure PFA - water-** (for supply, distribution and disposal of water) : See table

- **Maximum permissible pressure PS - other mediums** : See table

- **T°** : Mini. -10 °C
Maxi. 80 °C

- **Mediums** : Clear liquids, gas


- **Approvals** :

- **Other approvals available** : : please consult us

- **International construction Standards** :
NF Antipollution according to NF EN 13959
Thread connection according to NF E 03-005 ISO 228
CE Conformity Directive 97/23/CE

Overall dimensions


DN	Connection A		B	C	Weight
	"	mm			
1/2	3/4	20/27	67,0	28	0,195
3/4	1	26/34	74,0	35	0,300
1	1 1/4	33/42	80,5	39	0,470
1 1/4	1 1/2	40/49	88,5	44	0,640
1 1/2	2	50/60	95,0	48	1,135
2	2 1/2	66/76	115,0	56	1,750

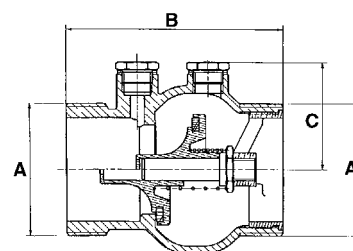

Technical data sheet Type 223 - EB anti-pollution non-return valve

Spare parts list and materials

Nr	Description	Material	EURO	ANSI
1	CASING	Brass	CuZn39Pb1AL-C	
2	GUIDE	Brass	CuZn39Pb2	ASTM B 124
3	CLOSING SYSTEM	Brass	CuZn39Pb3	
4	STEM	Brass	CuZn36Pb2As	
5	SEAL	EPDM		
6	SPRING	Stainless steel	X10CrNi18-8	AISI 302
7	PLUG	Brass	CuZn40Pb2	
8	SEAL	EPDM		




Working principle

DN	Opening pressure (in mm WC)	Kv	ζ
"		m ³ /H	
1/2	between 150 and 800	4,25	4,39
3/4		9,00	3,09
1		14,53	2,90
1 1/4		23,30	3,00
1 1/2		40,47	2,45
2		65,27	2,30

Direction for use :

- Solid line : Valve completely open
- Dotted line : opening stage of valve

ΔP

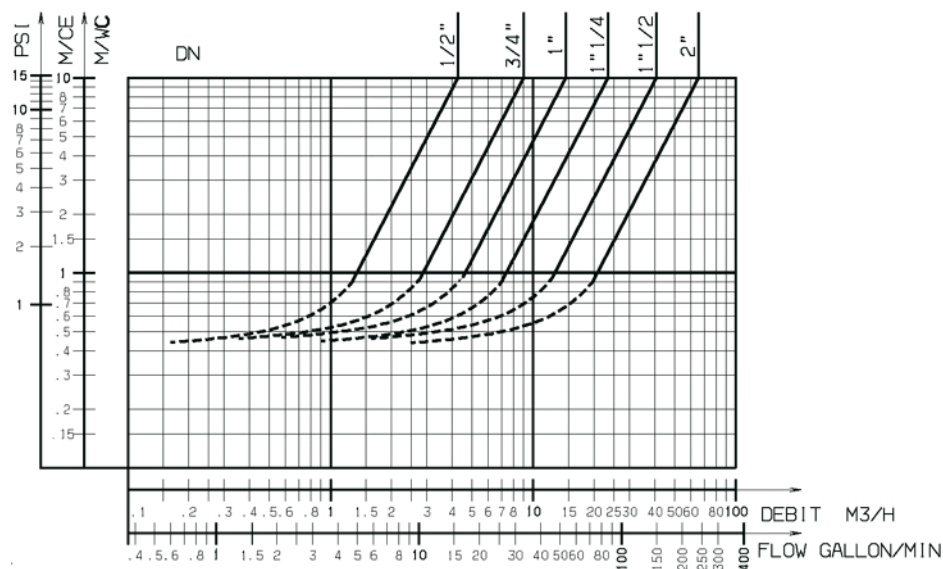

Danfoss can accept no responsibility for possible errors in catalogue, brochures and other printed material. Danfoss reserve the right to alter its products without notice. This also applies to products already agreed. All trademarks in this material are the property of the respective companies. Danfoss and the logo type are trademarks of Danfoss A/S. All right reserved.



Danfoss Socla

365 rue du lieutenant Putier
71530 VIREY LE GRAND
Postal address : BP273
71107 CHALON SUR SAONE Cedex

Tel : 33 3 85 97 42 52
Fax : 33 3 85 97 97 42
<http://www.danfoss-socla.com>
e-mail: commer@danfoss.com