

**1565N**

Elbow three piece nickel plated




The brass generic fittings are suitable for domestic and commercial plumbing, industrial, agricultural application and generally with every non aggressive fluid.

**TECHNICAL SPECIFICATIONS**

- Maximum temperature: 110 °C
- Minimum temperature: - 20°C (provided that the fluid remains in the liquid phase)
- Maximum operating pressure: 30 bar
- Threads: male UNI ISO 228  
female UNI ISO 228

**CONSTRUCTION SPECIFICATIONS**

- Body : EN12165 brass
- Nut : : EN12165 brass
- Tail : : EN12165 brass
- O-ring : Nitrile rubber NBR

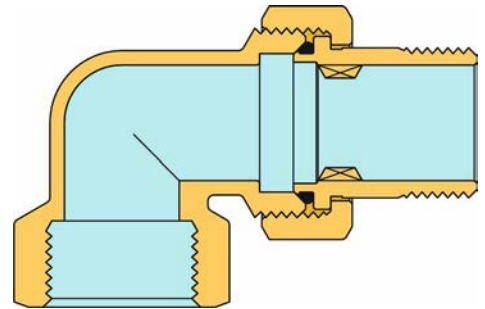

**PRODUCTION RANGE**

Art.	Code		Finishing
1565N	1500510	3/8"X3/8"	Nickel-plated
	1500168	1/2"X1/2"	
	1500244	3/4"X3/4"	
	1500250	1"X1"	
	1500430	1"1/4X1"1/4	
	1500450	1"1/2X1"1/2	
	1500543	2"X2"	

**CERTIFICATIONS**

